


ORFS Adapters

We feel better under pressure



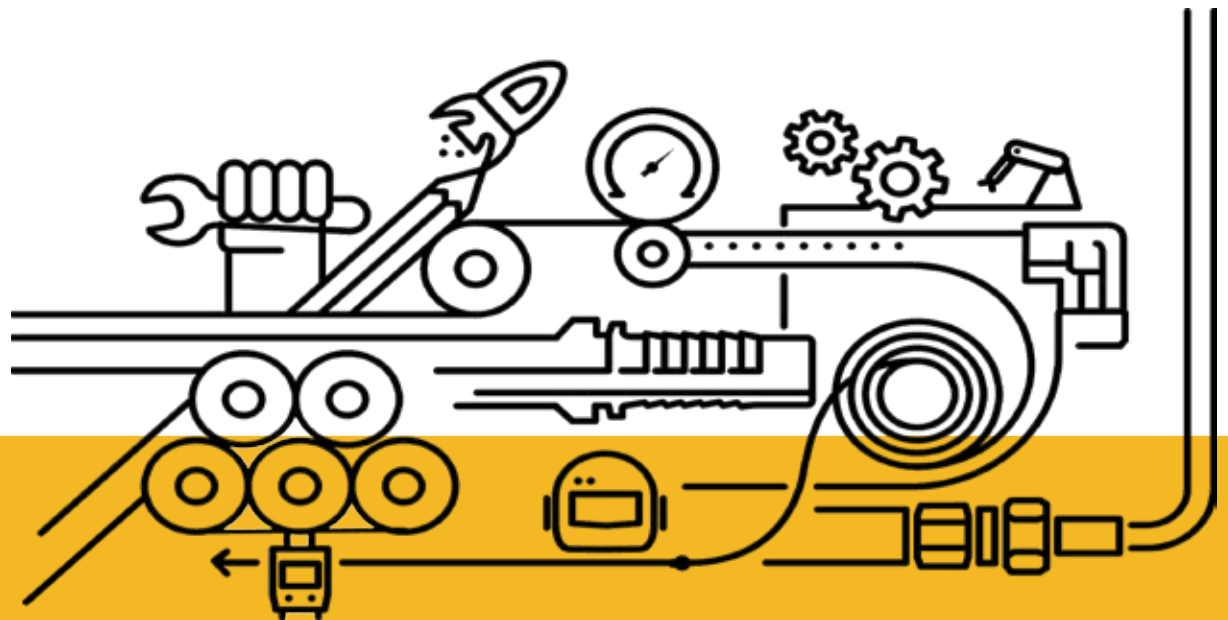

We feel better under pressure

Our strong points

Complete product range

Vitillo is the solution to any problem of hydraulic applications.

Spiral and braided hoses with metal reinforcement, standard and interlock press fittings, BSP, JIC, DIN and ORFS adaptors, customized special fittings: Whatever the customer's question, Vitillo is the answer.



Hoses



Press fittings
ISO 12151 SAE J516



BSP adaptors
BS 5200



JIC adaptors
SAE J514



DIN 24° adaptors
DIN 2353



ORFS adaptors
ORFS J1453

Our strong points

Complete product range

We aim to make our customer's lives easier:

Only one-stop business partner for any hydraulic system.
We offer our experience and expertise during every stage, from the design to the assembly of rigid/flexible hydraulic system.

BENDED PIPES



FITTED HOSES





Applications



High performances in very extreme conditions



Certifications




MINE SAFETY AND HEALTH
ADMINISTRATION
(MSHA)



DET NORSKE VERITAS (DNV)
GERMANISCHER LLOYD (GL)



RINA (Registro Navale Italiano)




















MarED



GOST-R



TEST
Opniujacej Atestujacej I Certyfikujacej
Wiroby Test Sp z.o.o.

Components ORFS	ABO BUSH / Pg. 14 	DBO ORFS NUT / Pg. 15 			
	AMO MALE ORFS - MALE ORFS / Pg. 16 	LMO 90° MALE EQUAL EL- BOW-ORFS MALE / Pg. 17 	QMO 45° MALE ELBOW-ORFS MALE / Pg. 18 	TMO T ADPT MALE ORFS / Pg. 19 	
Male -Male ORFS	APPMO BULKHEAD CONNECTION / Pg. 20 	LPPMO 90° BULKHEAD-ORFS MALE / Pg. 21 	QPPMO ORFS MALE BULKHEAD ELBOW-ORFS MALE / Pg. 22 	TPPMO. B RUN TEE BULKHEAD MALE ORFS / Pg. 23 	TPPMO. P BRANCH TEE BULKHEAD MALE ORFS / Pg. 24 
Swivel female-Male ORFS	AFGO MO ADP SWIVEL FEMAL ORFS - MALE ORFS / Pg. 25-26 	LMO. FGO 90° ADAPTOR FEMALE ORFS-MALE ORFS / Pg. 27 	QMO.FGO 45° ADAPTOR FEMALE ORFS -MALE ORFS / Pg. 28 	TMO FGO. B RUN FEMALE ORFS-TEE MALE ORFS / Pg. 29 	TMO FGO. P BRANCH FEMALE ORFS- TEE MALE ORFS / Pg. 30 
Swivel female ORFS	AFGO FEMALE ORFS -FEMALE ORFS / Pg. 31 				


Visual index

Male ORFS - Male BSPP	AMO MG. R ADP MALE ORFS MALE BSPP FORM E / Pg. 32-33	AMO MG. SV ADP MALE ORFS MALE BSPP 60° CONE / Pg. 34	
Male ORFS-Female BSPP	AMO FFG ADP MALE ORFS - FIXED FEMALE BSPP / Pg. 35	APPMO FFG STRAIGHT BULKHEAD ADP MALE ORFS-FEMALE BSPP / Pg. 36	
Female ORFS - BSPP	AFGO FFG ORFS SWIVEL NUT BSPP FEMALE / Pg. 37	AFGO MG SV ADP FEMALE ORFS MALE BSPP WITH 60° CONE / Pg. 38	AFGO MG R ADAPTOR FEMALE ORFS - MALE BSPP FORM E / Pg. 39
Male ORFS - Male METRIC	AMO MM. R ADP MALE ORFS MALE METRIC FORM E / Pg. 40-41	AMO MM ADP MALE ORFS MALE METRIC / Pg. 42	
Female ORFS- METRIC	AFGO FFM ORFS SWIVEL NUT METRIC FEMALE / Pg. 43	AFGO MM R ADAPTOR FEMALE ORFS - MALE METRIC FORM E / Pg. 44	
Male ORFS - Male UNF	AMO MU ADP MALE ORFS MALE UNF / Pg. 45-46		
Female ORFS - Male UNF	AFGO MU ADAPTOR FEMALE ORFS - MALE UNF / Pg. 47		


Visual index

Male ORFS - Male NPT	AMO MN ADP MALE ORFS MALE NPT / Pg. 48	LMO MN 90° ADAPTOR MALE ORFS- NPT MALE / Pg. 49	QMO MN 45° ADAPTOR MALE ORFS- NPT MALE / Pg. 50
Male ORFS - Female NPT	AMO FFN ADP MALE ORFS FIXED FEMALE NPT / Pg. 51	APPMO FFN STRAIGHT BULKHEAD MALE ORFS FEMALE NPT / Pg. 52	
Male ORFS - Male DIN	AMO ME ADP MALE ORFS MALE DIN / Pg. 53		
Male ORFS - Female DIN	AMO FE ADP MALE ORFS FEMALE DIN / Pg. 54		
Male ORFS - Male JIC	AMO MJ ADP MALE ORFS MALE JIC / Pg. 55		
ORFS - JIC	AMO FGJ ADP MALE ORFS FEMALE JIC / Pg. 56	AFGO MJ ADP FEMALE ORFS MALE JIC / Pg. 57	
Weld fittings	AMNST T WELDING ADP MALE ORFS / Pg. 58-59-60	TO .. W WELDING UNION / Pg. 61	LMO .. W 90° ADP MALE ORFS SIDE TO WELD / Pg. 62
			LMO .. T 90° ADP MALE ORFS SIDE FEMALE TO WELD / Pg. 63


LMO MOG
90° ADJUSTABLE MALE
ORFS- MALE BSPP
/ Pg. 64-65




LMO MOM R
90° ADJUSTABLE MALE
ORFS- MALE METRIC
/ Pg. 66




LMO MOU
90° ADJUSTABLE MALE
ORFS- MALE METRIC
/ Pg. 67-68




QMO MOG
45° ADJUSTABLE MALE
ORFS- MALE BSPP
/ Pg. 69-70




QMO MOM R
45° ADJUSTABLE MALE
ORFS- MALE METRIC
/ Pg. 71




QMO MOU
45° ADJUSTABLE MALE
ORFS- MALE METRIC
/ Pg. 72-73




TMO MOG B
RUN TEE ADJUSTABLE
MALE ORFS- MALE BSPP
/ Pg. 74-75




TMO MOM R B
RUN TEE ADJUSTABLE
MALE ORFS- MALE METRIC
/ Pg. 76




TMO MOU B
RUN TEE ADJUSTABLE
MALE ORFS- MALE METRIC
/ Pg. 77-78




TMO MOG P
BRUNCH TEE ADJUSTABLE
MALE ORFS- MALE BSPP
/ Pg. 79-80




TMO MOM R P
BRUNCH TEE ADJUSTABLE
MALE ORFS- MALE METRIC
/ Pg. 81




TMO MOU P
BRUNCH TEE ADJUSTABLE
MALE ORFS- MALE METRIC
/ Pg. 82-83




LFGO MOG
90° FEMALE ORFS- AD-
JUSTABLE MALE BSPP
/ Pg. 84




LFGO MOM R
90° FEMALE ORFS- AD-
JUSTABLE MALE METRIC
/ Pg. 85




LFGO MOU
90° ADJUSTABLE MALE
ORFS- MALE METRIC
/ Pg. 86



ATMO
MALE PLUG UNF
/ Pg. 87



ATFGO
FEMALE PLUG UNF
/ Pg. 88



Note:


Vitillo Spa offers a wide range of fittings and adaptors. If you have not found here the threads combination you were looking for, please check also in the other catalogues or ask to our Technical Staff.

La Vitillo Spa offre una vasta gamma di raccordi e adattatori. Se non avete trovato quì la combinazione del filetto che stavate cercando, si prega di controllare anche negli altri cataloghi o chiedere al nostro staff tecnico.

Nut - Bush coupling correspondence

bush D	bush D	Bush CODE	NUT Code
6	1/4	AB006	DB006
8	5/16	AB008	DB009
10	3/8	AB010	DB009
12	1/2	AB012	DB011
14	-	AB014	DB013
15	-	AB015	DB013
16	5/8	AB016	DB013
18		AB018	DB014
20	3/4	AB020	DB014
22	7/8	AB022	DB015
25	1	AB025	DB015
28		AB028	DB021
30	1.1/4	AB030	DB021
32		AB032	DB021
35		AB035	DB032
38	1.1/2	AB038	DB032


BUSH



BOCCOLA PER TUBO SVASATO
MANCHON
BÜCHSE
CASQUILLO

Code	Thread	Dimensions				Pressure
		D	D	D1	L1	
		in	mm	mm	mm	
ABO06		1/4	6	12.75	7.5	
ABO08		5/16	8	15.75	8.5	
ABO10		3/8	10	15.75	8.5	
ABO12		1/2	12	18.9	10.5	
ABO14		-	14	23.45	10.5	
ABO15		-	15	23.45	10.5	
ABO16		5/8	16	23.45	10.5	
ABO18			18	27.85	12	
ABO20		3/4	20	27.85	12	
ABO22		7/8	22	34.2	13.5	
ABO25		1	25	34.2	13.5	
ABO28		-	28	40.55	13	
ABO30		1.1/4	30	40.55	13	
ABO32		-	32	40.55	13	
ABO35		-	35	48.5	12.5	
ABO38		1.1/2	38	48.5	12.5	

ORFS NUT




DADO DI SERRAGGIO
ÉCROU ORFS
ORFS-MUTTER
TUERCA ORFS

F1 ORFS

Code	Thread	Dimensions			Pressure		
		F1	H	L1			
			mm	mm	Bar	Psi	L/S
DB006	9/16"		17	15			
DB009	11/16"		22	17			
DB011	13/16"		24	20			
DB013	1"		30	24			
DB014	1.3/16"		36	26.5			
DB015	1.7/16"		41	27.5			
DB021	1.11/16"		50	27.5			
DB032	2"		60	27.5			

ADAPTOR MALE ORFS - MALE ORFS




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO ORFS
 ADAPTATEUR MÂLE ORFS - MÂLE ORFS
 ADAPTER AG-ORFS/AG-ORFS
 ADAPTADOR MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO0606	9/16	9/16	17	10	10	27.5	630	9136
AMO0909	11/16	11/16	19	11	11	31	630	9136
AMO1111	13/16	13/16	22	13	13	35.5	630	9136
AMO1313	1	1	27	15.5	15.5	42.5	420	6091
AMO1414	1.3/16	1.3/16	32	17	17	47	420	6091
AMO1515	1.7/16	1.7/16	41	17.5	17.5	49.5	420	6091
AMO2121	1.11/16	1.11/16	46	17.5	17.5	51.5	280	4060
AMO3232	2	2	55	17.5	17.5	53	280	4060
AMO0906	11/16	9/16	19	11	10	30	630	9136
AMO1109	13/16	11/16	22	13	11	33.5	630	9136
AMO1311	1	13/16	27	15.5	13	40	420	6091
AMO1409	1.3/16	11/16	32	17	11	41	420	6091
AMO1411	1.3/16	13/16	32	17	13	43	420	6091
AMO1413	1.3/16	1	32	17	15.5	45.5	420	6091
AMO1514	1.7/16	1.3/16	41	17.5	17	49	420	6091
AMO2115	1.11/16	1.7/16	46	17.5	17.5	51.5	280	4060

90° ADAPTOR MALE ORFS - MALE ORFS




GOMITO 90° MASCHIO ORFS MASCHIO ORFS
 ADAPTATEUR COUDE 90° MÂLE ORFS - MÂLE ORFS
 ADAPTER 90° GSK AG-ORFS/AG-ORFS
 CODO 90° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
			mm	mm	mm		
LM00606	9/16	9/16	14	21.5	21.5	630	9136
LM00909	11/16	11/16	19	25	25	630	9136
LM01111	13/16	13/16	22	28	28	630	9136
LM01313	1	1	27	33.5	33.5	420	6091
LM01414	1.3/16	1.3/16	30	37.5	37.5	420	6091
LM01515	1.7/16	1.7/16	36	41.5	41.5	420	6091
LM02121	1.11/16	1.11/16	41	52	52	280	4060
LM03232	2	2	48	49	49	280	4060
LM00609	9/16	11/16	19	25	23.5	630	9136
LM00911	11/16	13/16	19	28	25	630	9136
LM01113	13/16	1	27	33.5	31.5	420	6091
LM00914	11/16	1.3/16	30	37.5	32.5	420	6091
LM01114	13/16	1.3/16	30	37.5	34.5	420	6091
LM01314	1	1.3/16	30	37.5	36.5	420	6091
LM01415	1.3/16	1.7/16	36	41.5	41	420	6091
LM01521	1.7/16	1.11/16	41	52	52	280	4060

45° ADAPTOR MALE ORFS - MALE ORFS




GOMITO 45° MASCHIO ORFS MASCHIO ORFS
ADAPTATEUR COUDE 45° MÂLE ORFS - MÂLE ORFS
ADAPTER 45° GSK AG-ORFS/AG-ORFS
CODO 45° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
			mm	mm	mm		
QMO0606	9/16	9/16	14	16	16	630	9136
QMO0909	11/16	11/16	19	19	19	630	9136
QMO1111	13/16	13/16	22	20.5	20.5	630	9136
QMO1313	1	1	27	23.5	23.5	420	6091
QMO1414	1.3/16	1.3/16	30	26	26	420	6091
QMO1515	1.7/16	1.7/16	36	30	30	420	6091
QMO2121	1.11/16	1.11/16	41	32	32	280	4060
QMO3232	2	2	48	37	37	280	4060

TEE ADAPTOR MALE ORFS

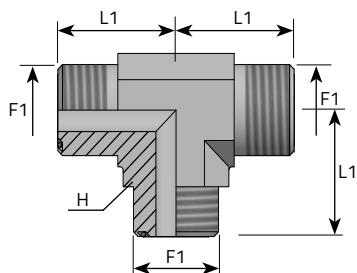


ADATTATORE A T MASCHIO ORFS MASCHIO ORFS
ADAPTATEUR TÉ MÂLE ORFS
ADAPTER T-STUCK 3 X AG-ORFS
ADAPTADOR TE MACHO ORFS

F1 ORFS

Code	Thread	Dimensions		Pressure	
		F1	H	L1	
			mm	mm	Bar Psi
TMO0606	9/16		14	21.5	630 9136
TMO0909	11/16		19	25	630 9136
TMO1111	13/16		22	28	630 9136
TMO1313	1		27	33.5	420 6091
TMO1414	1.3/16		30	37.5	420 6091
TMO1515	1.7/16		36	41.5	420 6091
TMO2121	1.11/16		41	44.5	280 4060
TMO3232	2		48	49	280 4060

STRAIGHT BULKHEAD ADAPTOR MALE ORFS




ADATTATORE PASSAPARETE MASCHIO ORFS
PASSE-CLOISON MÂLE ORFS
SCHOTTADAPTER AG-ORFS
PASATABIQUE MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions					Pressure	
	F1	F2	H	H1	L2	L1	L	Bar	Psi
			mm	mm	mm	mm	mm		
APPM00606	9/16	9/16	22	22	31.5	10	48	630	9136
APPM00909	11/16	11/16	27	27	34	11	53	630	9136
APPM01111	13/16	13/16	30	30	36.5	13	58,5	630	9136
APPM01313	1	1	36	36	40.5	15.5	66,5	420	6091
APPM01414	1.3/16	1.3/16	41	41	41.5	17	69	420	6091
APPM01515	1.7/16	1.7/16	46	46	42	17.5	70	280	4060
APPM02121	1.11/16	1.11/16	50	50	42	17.5	70	280	4060
APPM03232	2	2	60	60	42	17.5	70	280	4060

90° BULKHEAD ADAPTOR MALE ORFS - MALE ORFS




GOMITO 90° PASSAPARETE MASCHIO ORFS MASCHIO ORFS
PASSE-CLOISON COUDE 90° MÂLE ORFS - MÂLE ORFS
ADAPTER 90° GSK-SCHOTTADAPTER AG-ORFS - AG-ORFS
PASATABIQUE CODO 90° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	L1	L2	L3	Bar	Psi
			mm	mm	mm	mm	mm		
LPPM00606	9/16	9/16	14	22	21.5	47	31.5	630	9136
LPPM00909	11/16	11/16	19	27	25	52	34	630	9136
LPPM01111	13/16	13/16	22	30	28	55.5	36.5	630	9136
LPPM01313	1	1	27	36	33.5	63	40.5	420	6091
LPPM01414	1.3/16	1.3/16	30	41	37.5	67	41.5	420	6091
LPPM01515	1.7/16	1.7/16	36	46	41.5	71	42	420	6091
LPPM02121	1.11/16	1.11/16	41	50	52	75.5	42	280	4060
LPPM03232	2	2	48	60	49	79.5	42	280	4060

45° BULKHEAD ADAPTOR MALE ORFS - MALE ORFS




GOMITO 45° PASSAPARETE MASCHIO ORFS MASCHIO ORFS
PASSE-CLOISON COUDE 45° MÂLE ORFS - MÂLE ORFS
ADAPTER 45° GSK-SCHOTTADAPTER AG-ORFS - AG-ORFS
PASATABIQUE CODO 45° MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	L1	L2	L3		Bar	Psi
			mm	mm	mm	mm	mm			
QPPM00606	9/16	9/16	14	22	16	44	31.5		630	9136
QPPM00909	11/16	11/16	19	27	19	48.5	34		630	9136
QPPM01111	13/16	13/16	22	30	20.5	51	36.5		630	9136
QPPM01313	1	1	27	36	23.5	56.5	40.5		420	6091
QPPM01414	1.3/16	1.3/16	30	41	26	60.5	41.5		420	6091
QPPM01515	1.7/16	1.7/16	36	46	30	65	42		420	6091
QPPM02121	1.11/16	1.11/16	41	50	32	67	42		280	4060
QPPM03232	2	2	48	60	37	67	42		280	4060

RUN TEE BULKHEAD ADAPTOR MALE ORFS - MALE ORFS

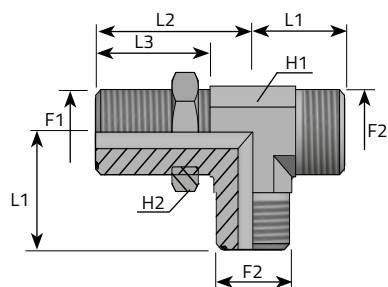


T PASSAPARETE AL BRACCIO MASCHIO ORFS MASCHIO ORFS
PASSE-CLOISON TÉ MÂLE ORFS - MÂLE ORFS
SCHOTTADAPTER T-STUCK AG-ORSF / AG-ORFS
PASATABIQUE TE MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	L1	L2	L3	Bar	Psi
			mm	mm	mm	mm	mm		
TPPM00606B	9/16	9/16	14	22	21.5	47	31.5	630	9136
TPPM00909B	11/16	11/16	19	27	25	52	34	630	9136
TPPM01111B	13/16	13/16	22	30	28	55.5	36.5	630	9136
TPPM01313B	1	1	27	36	33.5	63	40.5	420	6091
TPPM01414B	1.3/16	1.3/16	30	41	37.5	67	41.5	420	6091
TPPM01515B	1.7/16	1.7/16	36	46	41.5	71	42	420	6091
TPPM02121B	1.11/16	1.11/16	41	50	44.5	75.5	42	280	4060
TPPM03232B	2	2	48	60	49	79.5	42	280	4060

BRANCH TEE BULKHEAD ADAPTOR MALE ORFS - MALE ORFS




T PASSAPARETE AL PIEDE MASCHIO ORFS MASCHIO ORFS
PASSE-CLOISON TÉ MÂLE ORFS - MÂLE ORFS
SCHOTTADAPTER T-STÜCK 2 X AG-ORSF / 1 X AG-ORSF
PASATABIQUE TE MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	L1	L2	L3	Bar	Psi
			mm	mm	mm	mm	mm		
TPPM00606P	9/16	9/16	14	22	21.5	47	31.5	630	9136
TPPM00909P	11/16	11/16	19	27	25	52	34	630	9136
TPPM01111P	13/16	13/16	22	30	28	55.5	36.5	630	9136
TPPM01313P	1	1	27	36	33.5	63	40.5	420	6091
TPPM01414P	1.3/16	1.3/16	30	41	37.5	67	41.5	420	6091
TPPM01515P	1.7/16	1.7/16	36	46	41.5	71	42	420	6091
TPPM02121P	1.11/16	1.11/16	41	50	44.5	75.5	42	280	4060
TPPM03232P	2	2	48	60	49	79.5	42	280	4060

ADAPTOR SWIVEL FEMALE ORFS- MALE ORFS (1)



RIDUZIONE DIRITTA FEMMINA GIREVOLE ORFS MASCHIO ORFS
ADAPTATEUR FEMELLE TOURNANTE ORFS - MÂLE ORFS
REDUZIERUNG IG-ORFS / AG - ORFS
ADAPTADOR HEMBRA GIRATORIA ORFS - MACHO ORFS

F1 ORFS


F2 ORFS

Code	Thread		Dimensions			Pressure		
	F1	F2	H	L1	L2	form	Bar	Psi
			mm	mm	mm			
AFGO09M006	11/16	9/16	22	20	10	X	630	9136
AFGO11M006	13/16	9/16	24	22	10	Y	630	9136
AFGO13M006	1	9/16	30	23	10	Y	420	6091
AFGO14M006	1.3/16	9/16	36	25	10	Y	420	6091
AFGO15M006	1.7/16	9/16	41	26	10	Y	420	6091
AFGO21M006	1.11/16	9/16	50	26.5	10	Y	280	4060
AFGO32M006	2	9/16	60	26.5	10	Y	280	4060
AFGO11M009	13/16	11/16	24	23	11	X	630	9136
AFGO13M009	1	11/16	30	24	11	Y	420	6091
AFGO14M009	1.3/16	11/16	36	26	11	Y	420	6091
AFGO15M009	1.7/16	11/16	41	27	11	Y	420	6091
AFGO21M009	1.11/16	11/16	50	27.5	11	Y	280	4060
AFGO32M009	2	11/16	60	27.5	11	Y	280	4060

X: Version with crimped nut
Versione con dado pressato

Y: Version with slip back nut
Versione con dado sfilabile

ADAPTOR SWIVEL FEMALE ORFS- MALE ORFS (2)



RIDUZIONE DIRITTA FEMMINA GIREVOLE ORFS MASCHIO ORFS
ADAPTEUR FEMELLE TOURNANTE ORFS - MÂLE ORFS
REDUZIERUNG IG-ORFS / AG - ORFS
ADAPTADOR HEMBRA GIRATORIA ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions			Pressure		
	F1	F2	H	L1	L2	form	Bar	Psi
			mm	mm	mm			
AFGO13M011	1	13/16	30	25.5	13	Y	420	6091
AFGO14M011	1.3/16	13/16	36	27.5	13	Y	420	6091
AFGO14M015	1.3/16	1.7/16				X		
AFGO15M011	1.7/16	13/16	41	29	13	Y	420	6091
AFGO15M021	1.7/16	1.11/16				X		
AFGO21M011	1.11/16	13/16	50	29.5	13	Y	280	4060
AFGO32M011	2	13/16	60	29.5	13	Y	280	4060
AFGO14M013	1.3/16	1	36	29.5	15.5	X	420	6091
AFGO15M013	1.7/16	1	41	32	15.5	Y	420	6091
AFGO21M013	1.11/16	1	50	32	15.5	Y	280	4060
AFGO32M013	2	1	60	32	15.5	Y	280	4060
AFGO15M014	1.7/16	1.3/16	41	33	17	X	420	6091
AFGO21M014	1.11/16	1.3/16	50	33.5	17	Y	280	4060
AFGO32M014	2	1.3/16	60	33.5	17	Y	280	4060
AFGO21M015	1.11/16	1.7/16	50	34	17.5	X	280	4060
AFGO32M015	2	1.7/16	60	34	17.5	Y	280	4060
AFGO32M021	2	1.11/16	60	34	17.5	Y	280	4060


X: Version with crimped nut

Versione con dado pressato

Y: Version with slip back nut

Versione con dado sfilabile

90° ADAPTOR FEMALE ORFS – MALE ORFS

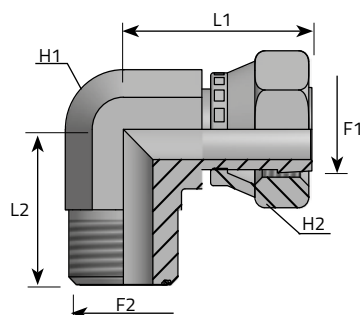


GOMITO A 90° FEMMINA ORFS DADO PRESSATO MASCHIO ORFS
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORFS
 ADAPTER 90° IG-ORFS / AG-ORFS
 CODO 90° HEMBRA ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM006FG006	9/16	9/16	14	17	26.5	21.5	420	6091
LM009FG009	11/16	11/16	19	22	29	25	420	6091
LM011FG011	13/16	13/16	22	24	38	28	420	6091
LM013FG013	1	1	27	30	41	33.5	420	6091
LM014FG014	1.3/16	1.3/16	30	36	46.5	37.5	420	6091
LM015FG015	1.7/16	1.7/16	36	41	53.5	41.5	380	5511
LM021FG021	1.11/16	1.11/16	41	50	58	44.5	280	4060
LM032FG032	2	2	48	60	61	49	280	4060

45° ADAPTOR FEMALE ORFS – MALE ORFS




GOMITO A 45° FEMMINA ORFS DADO PRESSATO MASCHIO ORFS
 ADAPTATEUR COUDE 45° FEMELLE ORFS – MÂLE ORFS
 ADAPTER 45° IG-ORFS / AG-ORFS
 CODO 45° HEMBRA ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QM006FG006	9/16	9/16	14	17	16	26.5	630	9136
QM009FG009	11/16	11/16	19	22	19	29	630	9136
QM011FG011	13/16	13/16	22	24	20.5	38	630	9136
QM013FG013	1	1	27	30	23.5	41	420	6091
QM014FG014	1.3/16	1.3/16	30	36	26	46.5	420	6091
QM015FG015	1.7/16	1.7/16	36	41	30	53.5	420	6091
QM021FG021	1.11/16	1.11/16	41	50	32	58	280	4060
QM032FG032	2	2	48	60	37	61	280	4060

RUN FEMALE ORFS-TEE MALE ORFS -TEE MALE ORFS

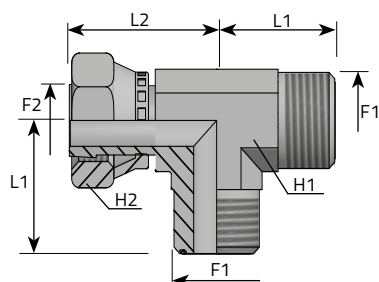


RACCORDO A "T" MASCHIO ORFS FEMMINA ORFS AL BRACCIO
 ADAPTATEUR TÉ RENVERSÉ MÂLE ORFS - FEMELLE ORFS
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X IG-ORFS
 ADAPTADOR EN L MACHO ORFS – MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM006FG006B	9/16	9/16	14	17	21.5	26.5	630	9136
TM009FG009B	11/16	11/16	19	22	25	29	630	9136
TM011FG011B	13/16	13/16	22	24	28	38	630	9136
TM013FG013B	1	1	27	30	33.5	41	420	6091
TM014FG014B	1.3/16	1.3/16	30	36	37.5	46.5	420	6091
TM015FG015B	1.7/16	1.7/16	36	41	41.5	53.5	420	6091
TM021FG021B	1.11/16	1.11/16	41	50	44.5	58	280	4060
TM032FG032B	2	2	48	60	49	61	280	4060

BRANCH TEE MALE ORFS -TEE MALE ORFS-FEMALE ORFS

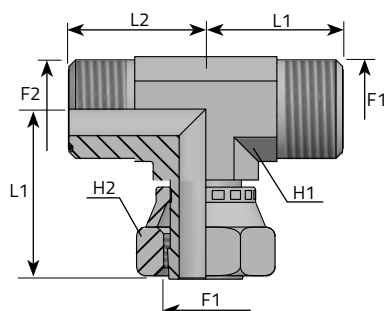


RACCORDO A "T" MASCHIO ORFS FEMMINA ORFS AL PIEDE
ADAPTATEUR TÉ RENVERSÉ MÂLE ORFS - FEMELLE ORFS
ADAPTER T-STÜCK 2 X AG-ORFS / 1 X IG-ORFS
ADAPTADOR EN T MACHO ORFS - MACHO ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM006FG006P	9/16	9/16	14	17	21.5	26.5	630	9136
TM009FG009P	11/16	11/16	19	22	25	29	630	9136
TM011FG011P	13/16	13/16	22	24	28	38	630	9136
TM013FG013P	1	1	27	30	33.5	41	420	6091
TM014FG014P	1.3/16	1.3/16	30	36	37.5	46.5	420	6091
TM015FG015P	1.7/16	1.7/16	36	41	41.5	53.5	420	6091
TM021FG021P	1.11/16	1.11/16	41	50	44.5	58	280	4060
TM032FG032P	2	2	48	60	49	61	280	4060

ADAPTOR FEMALE ORFS - FEMALE ORFS




ADATTATORE DIRITTO FEMMINA ORFS - FEMMINA ORFS DADO PRESSATO
 ADAPTATEUR FEMELLE ORFS - FEMELLE ORFS
 ADAPTER IG-ORFS/IG-ORFS
 ADAPTADOR HEMBRA ORFS - HEMBRA ORFS

F1 ORFS

F2 ORFS

Code	Thread		Dimensions			Pressure	
	F1	F2	H1	H2	L	Bar	Psi
			mm	mm	mm		
AFG006	9/16	9/16	17	17	39.5	630	9136
AFG009	11/16	11/16	19	22	45	630	9136
AFG011	13/16	13/16	22	24	51.5	630	9136
AFG013	1	1	27	30	61.5	420	6091
AFG014	1.3/16	1.3/16	32	36	68	420	6091
AFG015	1.7/16	1.7/16	41	41	71.5	420	6091
AFG021	1.11/16	1.11/16	46	50	73.5	280	4060
AFG032	2	2	55	60	75	280	4060

ADAPTOR MALE ORFS - MALE BSPP FORM E (1)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO GAS CILINDRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE BSPP FORME E
 ADAPTER AG-ORFS /AG ZÖLLIG FORM E
 ADAPTADOR MACHO ORFS - MACHO BSPP FORMA E

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AM006MG02R	9/16"	1/8"	17	10	8	25.5	630	9136
AM009MG04R	11/16"	1/4"	19	11	12	32	630	9136
AM011MG06R	13/16"	3/8"	22	13	12	34.5	630	9136
AM013MG08R	1"	1/2"	27	15.5	14	41	420	6091
AM014MG12R	1.3/16"	3/4"	32	17	16	46	420	6091
AM015MG16R	1.7/16"	1"	41	17.5	18	50	420	6091
AM021MG20R	1.11/16"	1.1/4"	50	17.5	20	54	280	4060
AM032MG24R	2"	1.1/2"	55	17.5	22	57.5	280	4060
AM006MG04R	9/16"	1/4"	19	10	12	31	630	9136
AM006MG06R	9/16"	3/8"	22	10	12	31.5	630	9136
AM006MG08R	9/16"	1/2"	27	10	14	35.5	630	9136
AM009MG02R	11/16"	1/8"	19	11	8	27.5	630	9136
AM009MG06R	11/16"	3/8"	22	11	12	32.5	630	9136
AM009MG08R	11/16"	1/2"	27	11	14	36.5	630	9136
AM009MG12R	11/16"	3/4"	32	11	16	40	420	6091
AM011MG04R	13/16"	1/4"	22	13	12	41	630	9136
AM011MG08R	13/16"	1/2"	27	13	14	44	630	9136
AM011MG12R	13/16"	3/4"	32	13	16	46	420	6091

ADAPTOR MALE ORFS - MALE BSPP FORM E (2)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO GAS CILINDRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE BSPP FORME E
 ADAPTER AG-ORFS /AG ZÖLLIG FORM E
 ADAPTADOR MACHO ORFS - MACHO BSPP FORMA E

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO13MG04R	1	1/4	27	15.5	12	38	420	6091
AMO13MG06R	1	3/8	27	15.5	12	38.5	420	6091
AMO13MG12R	1	3/4	32	15.5	16	44.5	420	6091
AMO13MG16R	1	1	41	15.5	18	48	420	6091
AMO14MG04R	1.3/16	1/4	32	17	12	41	420	6091
AMO14MG08R	1.3/16	1/2	32	17	14	44	420	6091
AMO14MG16R	1.3/16	1	41	17	18	49.5	420	6091
AMO14MG20R	1.3/16	1.1/4	50	17	20	53.5	420	6091
AMO15MG04R	1.7/16	1/4	41	17.5	12	43	420	6091
AMO15MG06R	1.7/16	3/8	41	17.5	12	43.5	420	6091
AMO15MG12R	1.7/16	3/4	41	17.5	16	48	420	6091
AMO15MG20R	1.7/16	1.1/4	50	17.5	20	54	420	6091
AMO15MG24R	1.7/16	1.1/2	55	17.5	22	57.5	280	4060
AMO21MG16R	1.11/16	1	46	17.5	18	52	280	4060
AMO21MG24R	1.11/16	1.1/2	55	17.5	22	57.5	280	4060

ADAPTOR MALE ORFS - MALE BSPP WITH 60° CONE




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO BSPP SVASATO 60°
 ADAPTATEUR MÂLE ORFS - MÂLE BSPP AVEC CÔNE 60°
 ADAPTER AG-ORFS/AG-BSPP MIT 60° KONUS
 ADAPTADOR MACHO ORFS -MACHO BSPP CON CONO 60°

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO06MG02SV	9/16	1/8	17	8	10	25.5	400	5801
AMO09MG04SV	11/16	1/4	19	11	11	31	400	5801
AMO11MG06SV	13/16	3/8	22	12	13	34.5	400	5801
AMO13MG08SV	1	1/2	27	14	15.5	41	350	5076
AMO14MG12SV	1.3/16	3/4	32	16	17	46	315	4568
AMO15MG16SV	1.7/16	1	41	19	17.5	51	250	3625
AMO21MG20SV	1.11/16	1.1/4	50	20	17.5	54	200	2900
AMO32MG24SV	2	1.1/2	55	23	17.5	58.5	160	2320
AMO06MG04SV	9/16	1/4	17	11	10	28.5	400	5801
AMO06MG06SV	9/16	3/8	17	12	10	29.5	400	5801
AMO09MG06SV	11/16	3/8	19	12	11	32	400	5801
AMO09MG08SV	11/16	1/2	22	14	11	34.5	350	5076
AMO11MG04SV	13/16	1/4	22	11	13	33.5	400	5801
AMO11MG08SV	13/16	1/2	22	14	13	36.5	350	5076
AMO11MG12SV	13/16	3/4	27	16	13	40.5	315	4568
AMO13MG06SV	1	3/8	27	12	15.5	39	400	5801
AMO13MG10SV	1	5/8	27	16	15.5	43	350	5076
AMO13MG12SV	1	3/4	27	16	15.5	43	315	4568
AMO14MG08SV	1.3/16	1/2	32	14	17	44	350	5076
AMO14MG16SV	1.3/16	1	41	19	17	50.5	250	3625
AMO15MG12SV	1.7/16	3/4	41	16	17.5	48	315	4568
AMO15MG20SV	1.7/16	1.1/4	46	20	17.5	54	200	2900

ADAPTOR MALE ORFS - FIXED FEMALE BSPP




ADATTATORE DIRITTO MASCHIO ORFS FEMMINA FISSA BSPP
ADAPTATEUR MÂLE ORFS - FEMELLE FIXE BSPP
ADAPTER AG-ORFS/ IG-ZÖLLIG
ADAPTADOR MACHO ORFS -HEMBRA FIJA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique, Gas cilindrica

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L	Bar	Psi
			mm	mm	mm		
AM006FFG04	9/16	1/4	19	10	31	630	9136
AM009FFG04	11/16	1/4	19	11	32	630	9136
AM011FFG06	13/16	3/8	24	13	35	630	9136
AM013FFG08	1	1/2	30	15.5	41,5	420	6091
AM014FFG12	1.3/16	3/4	36	17	46	420	6091
AM015FFG16	1.7/16	1	41	17.5	48,5	420	6091
AM021FFG20	1.11/16	1.1/4	55	17.5	53,5	280	4060
AM032FFG24	2	1.1/2	60	17.5	55,5	280	4060
AM011FFG04	13/16	1/4	22	13	34	630	9136
AM014FFG08	1.3/16	1/2	32	17	43	420	6091

STRAIGHT BULKHEAD ADAPTOR MALE ORFS - FEMALE BSPP




ADATTATORE PASSAPARETE MASCHIO ORFS FEMMINA BSPP
PASSE-CLOISON MÂLE ORFS- FEMELLE BSPP
SCHOTTADAPTER AG-ORFS / IG- BSPP
PASATABIQUE MACHO ORFS - HEMBRA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L	Bar	Psi
			mm	mm	mm	mm		
APPM006FFG04	9/16	1/4	22	22	31.5	52.5	630	9136
APPM009FFG04	11/16	1/4	27	27	34	55	630	9136
APPM011FFG06	13/16	3/8	30	30	36.5	58.5	630	9136
APPM013FFG08	1	1/2	36	36	40.5	66.5	420	6091
APPM014FFG12	1.3/16	3/4	41	41	41.5	70.5	420	6091
APPM015FFG16	1.7/16	1	46	46	42	73	420	6091
APPM021FFG20	1.11/16	1.1/4	50	50	42	78	280	4060
APPM032FFG24	2	1.1/2	60	60	42	80	280	4060

ORFS SWIVEL NUT - BSPP FEMALE




PRESA DI PRESSIONE CON DADO GIREVOLE ORFS FEMMINA BSPP
ÉCROU TOURNANTE ORFS - FEMELLE BSPP -
ORFS GIRATORIA MÜTTER - AG BSPP
TUERCA ORFS -HEMBRA BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions			Pressure	
	F1	F2	H1	H2	L	Bar	Psi
			mm	mm	mm		
AFGO06FFG04	9/16	1/4	19	17	39	630	9136
AFGO09FFG04	11/16	1/4	19	22	41	630	9136
AFGO11FFG04	13/16	1/4	19	24	43	630	9136
AFGO13FFG04	1	1/4	24	30	46	420	6091
AFGO14FFG04	1.3/16	1/4	30	36	47.5	420	6091
AFGO15FFG04	1.7/16	1/4	36	41	48	420	6091
AFGO21FFG04	1.11/16	1/4	-	50	-	280	4060
AFGO32FFG04	2	1/4	-	60	-	280	4060

ADAPTOR FEMALE ORFS - MALE BSPP WITH 60° CONE




ADATTATORE DIRITTO FEMMINA ORFS MASCHIO BSPP SVASATO 60°
 ADAPTATEUR FEMELLE ORFS - MÂLE BSPP AVEC CÔNE 60°
 ADAPTER IG-ORFS/AG-BSPP MIT 60° KONUS
 ADAPTADOR HEMBRA ORFS - MACHO BSPP CON CONO 60°

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
AFGO06MG02SV	9/16	1/8	14	17	23.5	8	400	5801
AFGO09MG04SV	11/16	1/4	17	22	27	12	400	5801
AFGO11MG06SV	13/16	3/8	22	24	35.5	12	400	5801
AFGO13MG08SV	1	1/2	24	30	36.5	14	350	5076
AFGO14MG12SV	1.3/16	3/4	32	36	41.5	16	315	4568
AFGO15MG16SV	1.7/16	1	41	41	43	18	250	3625
AFGO21MG20SV	1.11/16	1.1/4	50	50	44.5	20	200	2900
AFGO32MG24SV	2	1.1/2	55	60	46.5	22	160	2320
AFGO06MG04SV	9/16	1/4	14	17	23.5	12	400	5801
AFGO06MG06SV	9/16	3/8	17	17	25	12	400	5801
AFGO09MG06SV	11/16	3/8	22	22	27	12	400	5801
AFGO09MG08SV	11/16	1/2	22	22	27.5	14	350	5076
AFGO11MG04SV	13/16	1/4	19	24	30.5	11	400	5801
AFGO11MG08SV	13/16	1/2	27	24	30.5	14	350	5076
AFGO11MG12SV	13/16	3/4	27	24	34	16	315	4568
AFGO13MG06SV	1	3/8	24	30	36.5	12	400	5801
AFGO13MG10SV	1	5/8	24	30	36.5	16	350	5076
AFGO13MG12SV	1	3/4	27	30	38	16	315	4568
AFGO14MG08SV	1.3/16	1/2	30	36	40.5	14	350	5076
AFGO14MG16SV	1.3/16	1	36	36	42	19	250	3625
AFGO15MG12SV	1.7/16	3/4	36	41	43	16	315	4568
AFGO15MG20SV	1.7/16	1.1/4	46	41	44.5	20	200	2900

ADAPTOR FEMALE ORFS - MALE BSPP FORM E




ADATTATORE DIRITTO FEMMINA ORFS MASCHIO BSPP FORMA E
 ADAPTATEUR FEMELLE ORFS - MÂLE BSPP FORME E
 ADAPTER IG-ORFS/AG-BSPP FORM E
 ADAPTADOR HEMBRA ORFS - MACHO BSPP FORMA E

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
AFGO06MG02R	9/16	1/8	17	17	26.5	8	630	9136
AFGO09MG04R	11/16	1/4	19	22	28.5	12	630	9136
AFGO11MG06R	13/16	3/8	22	24	35.5	12	630	9136
AFGO13MG08R	1	1/2	27	30	38	14	420	6091
AFGO14MG12R	1.3/16	3/4	32	36	41.5	16	420	6091
AFGO15MG16R	1.7/16	1	41	41	49	18	420	6091
AFGO21MG20R	1.11/16	1.1/4	50	50	49	20	280	4060
AFGO32MG24R	2	1.1/2	55	60	49	22	280	4060
AFGO06MG04R	9/16	1/4	19	17	26.5	12	630	9136
AFGO09MG06R	11/16	3/8	22	22	32.5	12	630	9136
AFGO11MG08R	13/16	1/2	27	24	34	14	630	9136
AFGO14MG20R	1.3/16	1.1/4	50	36	48	20	420	6091

ADAPTOR MALE ORFS - METRIC MALE FORM E (1)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER AG-ORFS/AG-METRISCHFORM E
 ADAPTADOR MACHO ORFS -MACHO MÉTRICOFORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO06MM12R	9/16	12X1.5	17	10	12	30	630	9136
AMO09MM14R	11/16	14X1.5	19	11	12	32	630	9136
AMO11MM18R	13/16	18X1.5	24	13	12	34,5	630	9136
AMO13MM22R	1	22X1.5	27	15.5	14	41	420	6091
AMO14MM27R	1.3/16	27X2	32	17	16	46	420	6091
AMO15MM33R	1.7/16	33X2	41	17.5	18	50	420	6091
AMO21MM42R	1.11/16	42X2	50	17.5	20	54	280	4060
AMO32MM48R	2	48X1.5	55	17.5	22	57,5	280	4060
AMO06MM10R	9/16	10X1	17	10	8	25,5	350	5076
AMO06MM14R	9/16	14X1.5	19	10	12	31	630	9136
AMO09MM12R	11/16	12X1.5	19	11	12	32	630	9136
AMO09MM16R	11/16	16X1.5	22	11	12	34	630	9136
AMO09MM18R	11/16	18X1.5	24	11	12	32,5	630	9136
AMO11MM14R	13/16	14X1.5	22	13	12	35	630	9136
AMO11MM16R	13/16	16X1.5	22	13	12	34,5	630	9136
AMO11MM22R	13/16	22X1.5	27	13	14	38,5	630	9136

ADAPTOR MALE ORFS - METRIC MALE FORM E (2)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER AG-ORFS/AG-METRISCHFORM E
 ADAPTADOR MACHO ORFS -MACHO MÉTRICOFORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO13MM18R	1	18x1.5	27	15.5	12	38,5	420	6091
AMO13MM27R	1	27x2	32	15.5	16	44,5	420	6091
AMO14MM22R	1.3/16	22x1.5	32	17	14	44	420	6091
AMO14MM33R	1.3/16	33x2	41	17	18	49,5	420	6091
AMO15MM27R	1.7/16	27x2	41	17.5	16	48	420	6091
AMO15MM42R	1.7/16	42x2	50	17.5	20	54	420	6091
AMO21MM33R	1.11/16	33x2	46	17.5	18	52	280	4060
AMO21MM48R	1.11/16	48x2	55	17.5	22	57,5	280	4060

ADAPTOR MALE ORFS - METRIC MALE




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR MÂLE ORFS - MÂLE MÉTRIQUE AVEC O-RING
 ADAPTER AG-ORFS/AG-METRISCH MIT O.R.
 ADAPTADOR MACHO ORFS -MACHO MÉTRICO

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO09MM14	11/16	14x1.5	19	11	13.5	35	630	9136
AMO09MM12	11/16	12X1.5	22	13	13.5	32	630	9136
AMO11MM22	13/16	22X1.5	22	13	17	38.5	630	9136
AMO14MM22	1.3/16	22X1.5	32	17	17	44	630	9136
AMO15MM27	1.7/16	27X2	41	17.5	19	48	420	6091
AMO15MM33	1.7/16	33X2	41	17.5	22	50	420	6091
AMO21MM42	1.11/16	42X2	50	17.5	22	50	280	6091

ORFS SWIVEL NUT - METRIC FEMALE




PRESA DI PRESSIONE CON DADO GIREVOLE ORFS FEMMINA METRICA
ÉCROU TOURNANTE ORFS - FEMELLE MÉTRIQUE
ORFS MÜTTER - AG METRISCH
TUERCA GIRATORIA ORFS - HEMBRA MÉTRICA

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions			Pressure	
	F1	F2	H1	H2	L	Bar	Psi
			mm	mm	mm		
AFGO06FFM10	9/16	10x1	19	17	39	630	9136
AFGO09FFM10	11/16	10x1	19	22	41	630	9136
AFGO11FFM10	13/16	10x1	19	24	43	630	9136
AFGO13FFM10	1	10x1	24	30	40	420	6091
AFGO14FFM10	1.3/16	10x1	-	36	-	420	6091
AFGO15FFM10	1.7/16	10x1	-	41	-	420	6091
AFGO21FFM10	1.11/16	10x1	-	50	-	280	4060
AFGO32FFM10	2	10x1	-	60	-	280	4060

ADAPTOR FEMALE ORFS - MALE METRIC FORM E




ADATTATORE DIRITTO FEMMINA ORFS MASCHIO METRICO FORMA E
 ADAPTATEUR FEMELLE ORFS - MÂLE MÉTRIQUE FORME E
 ADAPTER IG-ORFS/AG-METRISCH FORM E
 ADAPTADOR HEMBRA ORFS - MACHO MÉTRICO FORMA E

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
AFGO06MM12R	9/16	12X1.5	17	17	26.5	12	630	9136
AFGO09MM14R	11/16	14X1.5	19	22	28.5	12	630	9136
AFGO11MM18R	13/16	18X1.5	24	24	35.5	12	630	9136
AFGO13MM22R	1	22X1.5	27	30	38	14	420	6091
AFGO14MM27R	1.3/16	27X2	32	36	41.5	16	420	6091
AFGO15MM33R	1.7/16	33X2	41	41	49	18	420	6091
AFGO21MM42R	1.11/16	42X2	50	50	49	20	280	4060
AFGO32MM48R	2	48X2	55	60	49	22	280	4060
AFGO06MM10R	9/16	10X1	17	17	26.5	8	350	5076
AFGO09MM16R	11/16	16X1.5	22	22	28.5	12	630	9136
AFGO11MM16R	13/16	16X1.5	22	24	31.5	12	630	9136
AFGO13MM18R	1	18X1.5	27	30	38	12	420	6091
AFGO14MM22R	1.3/16	22X1.5	32	36	41.5	14	420	6091
AFGO15MM27R	1.7/16	27X2	41	41	49	16	420	6091

ADAPTOR MALE ORFS - MALE UNF (1)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO UNF
ADAPTATEUR MÂLE ORFS - MÂLE UNF
ADAPTER AG-ORFS/AG-UNF
ADAPTADOR MACHO ORFS -MACHO UNF

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO06MU04	9/16	7/16	17	10	11	29	630	9136
AMO09MU06	11/16	9/16	19	11	12	32	630	9136
AMO11MU08	13/16	3/4	22	13	14	36,5	630	9136
AMO13MU10	1	7/8	27	15.5	16	43	420	6091
AMO14MU12	1.3/16	1.1/16	32	17	18.5	48,5	420	6091
AMO15MU16	1.7/16	1.5/16	41	17.5	18.5	50,5	420	6091
AMO21MU20	1.11/16	1.5/8	46	17.5	18.5	52	280	4060
AMO32MU24	2	1.7/8	55	17.5	18.5	54	280	4060
AMO06MU05	9/16	1/2	17	10	11	29	630	9136
AMO06MU06	9/16	9/16	19	10	12	31	630	9136
AMO06MU08	9/16	3/4	22	10	14	33,5	630	9136
AMO09MU04	11/16	7/16	19	11	11	31	630	9136
AMO09MU05	11/16	1/2	19	11	11	31	630	9136
AMO09MU08	11/16	3/4	22	11	14	34,5	630	9136
AMO09MU10	11/16	7/8	27	11	16	38,5	630	9136
AMO09MU12	11/16	1.1/16	32	11	18.5	42,5	420	6091

ADAPTOR MALE ORFS - MALE UNF (2)




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO UNF
ADAPTATEUR MÂLE ORFS - MÂLE UNF
ADAPTER AG-ORFS/AG-UNF
ADAPTADOR MACHO ORFS -MACHO UNF

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO11MU06	13/16	9/16	22	13	12	34,5	630	9136
AMO11MU10	13/16	7/8	27	13	16	40,5	630	9136
AMO11MU12	13/16	1.1/16	32	13	18.5	44,5	420	6091
AMO11MU16	13/16	1.5/16	41	13	18.5	46	420	6091
AMO13MU08	1	3/4	27	15.5	14	41	420	6091
AMO13MU12	1	1.1/16	32	15.5	18.5	47	420	6091
AMO14MU08	1.3/16	3/4	32	17	14	44	420	6091
AMO14MU10	1.3/16	7/8	32	17	16	46	420	6091
AMO14MU16	1.3/16	1.5/16	41	17	18.5	50	420	6091
AMO15MU12	1.7/16	1.1/16	41	17.5	18.5	50,5	420	6091
AMO15MU20	1.7/16	1.5/8	46	17.5	15	48.5	280	4060
AMO21MU16	1.11/16	1.5/16	46	17.5	18.5	52	280	4060
AMO21MU24	1.11/16	1.7/8	55	17.5	18.5	54	280	4060
AMO32MU20	2	1.5/8	55	17.5	15	50.5	280	4060

ADAPTOR FEMALE ORFS - MALE UNF




ADATTATORE DIRITTO FEMMINA ORFS DADO PRESSATO MASCHIO UNF
 ADAPTATEUR FEMELLE ORFS - MÂLE UNF
 ADAPTER IG-ORFS/AG-UNF
 ADAPTADOR HEMBRA ORFS - MACHO UNF

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
AFGO06MU04	9/16	7/16	17	17	26.5	11	630	9136
AFGO09MU06	11/16	9/16	19	22	28.5	12	630	9136
AFGO11MU08	13/16	3/4	22	24	35.5	14	630	9136
AFGO13MU10	1	7/8	27	30	38	16	420	6091
AFGO14MU12	1.3/16	1.1/16	32	36	41.5	18.5	420	6091
AFGO15MU16	1.7/16	1.5/16	41	41	49	18.5	420	6091
AFGO21MU20	1.11/16	1.5/8	46	50	49	18.5	280	4060
AFGO32MU24	2	1.7/8	55	60	49	18.5	280	4060
AFGO09MU04	11/16	7/16	19	22	28.5	11	630	9136
AFGO09MU08	11/16	3/4	22	22	32.5	11	630	9136
AFGO11MU10	13/16	7/8	27	24	34	16	630	9136
AFGO13MU08	1	3/4	27	30	38	14	420	6091
AFGO13MU12	1	1.1/16	32	30	39	18.5	420	6091
AFGO14MU10	1.3/16	7/8	32	36	41.5	16	420	6091
AFGO14MU16	1.3/16	1.5/16	41	36	48	18.5	420	6091

ADAPTOR MALE ORFS - MALE NPT




ADATTATORE DIRITTO MASCHIO ORFS MASCHIO NPT
ADAPTATEUR MÂLE ORFS - MÂLE NPT
ADAPTER AG-ORFS/AG-NPT
ADAPTADOR MACHO ORFS -MACHO NPT

F1 ORFS

F2 NPT

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO06MN02	9/16	1/8	17	10	10	27,5	420	6091
AMO09MN04	11/16	1/4	19	11	14,5	34,5	630	9136
AMO11MN06	13/16	3/8	22	13	14,5	37	630	9136
AMO13MN08	1	1/2	27	15,5	19	46	420	6091
AMO14MN12	1.3/16	3/4	32	17	19	49	420	6091
AMO15MN16	1.7/16	1	41	17,5	24	56	420	6091
AMO21MN20	1.11/16	1.1/4	46	17,5	25	59	280	4060
AMO32MN24	2	1.1/2	55	17,5	26	61,5	280	4060
AMO06MN04	9/16	1/4	17	10	14,5	32	630	9136
AMO06MN06	9/16	3/8	17	10	14,5	32	630	9136
AMO09MN06	11/16	3/8	19	11	14,5	34,5	630	9136
AMO09MN08	11/16	1/2	22	11	19	39,5	630	9136
AMO11MN04	13/16	1/4	22	13	14,5	37	630	9136
AMO11MN08	13/16	1/2	22	13	19	41,5	630	9136
AMO11MN12	13/16	3/4	27	13	19	43,5	420	6091
AMO13MN06	1	3/8	27	15,5	14,5	41,5	420	6091
AMO13MN12	1	3/4	27	15,5	19	46	420	6091
AMO14MN08	1.3/16	1/2	32	17	19	49	420	6091
AMO14MN16	1.3/16	1	36	17	24	54	420	6091
AMO15MN12	1.7/16	3/4	41	17,5	19	51	420	6091
AMO21MN16	1.11/16	1	46	17,5	24	58	280	4060
AMO32MN20	2	1.1/4	55	17,5	25	60,5	280	4060

90° ADAPTOR MALE ORFS - MALE NPT




GOMITO 90° MASCHIO ORFS MASCHIO NPT
ADAPTATEUR COUDE 90° MÂLE ORFS - MÂLE NPT
ADAPTER 90° GSK AG-ORFS/AG-NPT
CODO 90° MACHO ORFS - MACHO NPT

F1 ORFS

F2 NPT

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
			mm	mm	mm		
LM006MN02	9/16	1/8	14	21.5	20	420	6091
LM009MN04	11/16	1/4	19	25	31	630	9136
LM011MN06	13/16	3/8	22	28	31	630	9136
LM013MN08	1	1/2	27	33.5	37.5	420	6091
LM014MN12	1.3/16	3/4	30	37.5	40	420	6091
LM015MN16	1.7/16	1	36	41.5	50	420	6091
LM021MN20	1.11/16	1.1/4	41	52	60	280	4060
LM032MN24	2	1.1/2	48	49	67	280	4060
LM006MN04	9/16	1/4	14	21.5	28	630	9136
LM006MN06	9/16	3/8	19	23.5	31	630	9136
LM009MN06	11/16	3/8	19	25	31	630	9136
LM009MN08	11/16	1/2	22	28	37.5	630	9136
LM011MN04	13/16	1/4	22	28	31	630	9136
LM011MN08	13/16	1/2	22	30	37.5	630	9136
LM011MN12	13/16	3/4	27	31.5	40	420	6091
LM013MN06	1	3/8	27	33.5	33	420	6091
LM013MN12	1	3/4	27	33.5	40	420	6091
LM014MN08	1.3/16	1/2	30	37.5	40	420	6091
LM014MN16	1.3/16	1	33	38	50	420	6091
LM015MN12	1.7/16	3/4	36	41.5	45.5	420	6091
LM021MN16	1.11/16	1	41	52	59	280	4060
LM032MN20	2	1.1/4	48	49	66	280	4060

45° ADAPTOR MALE ORFS - MALE NPT




GOMITO 45° MASCHIO ORFS MASCHIO NPT
ADAPTATEUR COUDE 45° MÂLE ORFS - MÂLE NPT
ADAPTER 45° GSK AG-ORFS/AG-NPT
CODO 45° MACHO ORFS - MACHO NPT

F1 ORFS

F2 NPT

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L2	Bar	Psi
			mm	mm	mm		
QMO06MN02	9/16	1/8	14	16	16.5	420	6091
QMO09MN04	11/16	1/4	19	19	24	630	9136
QMO11MN06	13/16	3/8	22	20.5	24	630	9136
QMO13MN08	1	1/2	27	23.5	30.5	420	6091
QMO14MN12	1.3/16	3/4	30	26	30.5	420	6091
QMO15MN16	1.7/16	1	36	30	38	420	6091
QMO21MN20	1.11/16	1.1/4	41	32	42	280	4060
QMO32MN24	2	1.1/2	48	37	45	280	4060
QMO06MN04	9/16	1/4	14	16	22	630	9136
QMO06MN06	9/16	3/8	19	17.5	24	630	9136
QMO09MN06	11/16	3/8	19	19	24	630	9136
QMO09MN08	11/16	1/2	22	20	29.5	630	9136
QMO11MN04	13/16	1/4	22	20.5	24	630	9136
QMO11MN08	13/16	1/2	22	21	29.5	630	9136
QMO11MN12	13/16	3/4	27	21.5	30.5	420	6091
QMO13MN06	1	3/8	27	23.5	27	420	6091
QMO13MN12	1	3/4	27	23.5	30.5	420	6091
QMO14MN08	1.3/16	1/2	30	26	30.5	420	6091
QMO14MN16	1.3/16	1	33	29.5	38	420	6091
QMO15MN12	1.7/16	3/4	36	30	33	420	6091
QMO21MN16	1.11/16	1	41	32	41	280	4060
QMO32MN20	2	1.1/4	48	37	44	280	4060

ADAPTOR MALE ORFS - FIXED FEMALE NPT




ADATTATORE DIRITTO MASCHIO ORFS FEMMINA FISSA NPT
 ADAPTATEUR MÂLE ORFS - FEMELLE FIXE NPT
 ADAPTER AG-ORFS/ IG-NPT
 ADAPTADOR MACHO ORFS -HEMBRA FIJA NPT

F1 ORFS

F2 NPT

Code	Thread		Dimensions			Pressure	
	F1	F2	H	L1	L	Bar	Psi
			mm	mm	mm		
AMO06FFN04	9/16	1/4	19	10	31,5	630	9136
AMO09FFN04	11/16	1/4	19	11	32,5	630	9136
AMO11FFN06	13/16	3/8	24	13	36	630	9136
AMO13FFN08	1	1/2	30	15.5	44	420	6091
AMO14FFN12	1.3/16	3/4	36	17	47	420	6091
AMO15FFN16	1.7/16	1	41	17.5	54	420	6091
AMO21FFN20	1.11/16	1.1/4	55	17.5	56,5	280	4060
AMO32FFN24	2	1.1/2	60	17.5	56,5	280	4060
AMO11FFN04	13/16	1/4	22	13	34,5	630	9136
AMO14FFN08	1.3/16	1/2	32	17	45,5	420	6091

STRAIGHT BULKHEAD ADAPTOR MALE ORFS - FEMALE NPT




ADATTATORE PASSAPARETE MASCHIO ORFS FEMMINA NPT
PASSE-CLOISON MÂLE ORFS- FEMELLE NPT
SCHOTTADAPTER AG-ORFS / IG- NPT
PASATABIQUE MACHO ORFS - HEMBRA NPT

F1 ORFS

F2 NPT

Code	Thread		Dimensions				Pressure	
	F1	F2	H	H1	L1	L	Bar	Psi
			mm	mm	mm	mm		
APPM006FFN04	9/16	1/4	22	22	31.5	53	630	9136
APPM009FFN04	11/16	1/4	27	27	34	55.5	630	9136
APPM011FFN06	13/16	3/8	30	30	36.5	59	630	9136
APPM013FFN08	1	1/2	36	36	40.5	69	420	6091
APPM014FFN12	1.3/16	3/4	41	41	41.5	71.5	420	6091
APPM015FFN16	1.7/16	1	46	46	42	78.5	420	6091
APPM021FFN20	1.11/16	1.1/4	50	50	42	81	280	4060
APPM032FFN24	2	1.1/2	60	60	42	81	280	4060

ADAPTOR MALE ORFS - MALE DIN

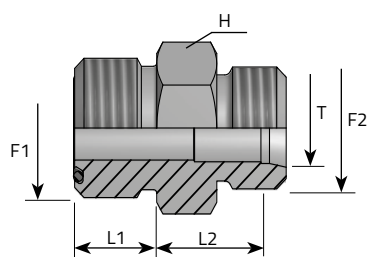


ADATTATORE DIRITTO MASCHIO ORFS MASCHIO DIN
ADAPTATEUR MÂLE ORFS - MÂLE DIN
ADAPTER AG-ORFS/AG-DIN
ADAPTADOR MACHO ORFS -MACHO DIN

F1 ORFS

F2 DIN

Code	Thread		Dimensions					Pressure	
	F1	F2	H	L1	L2	L3	T	Bar	Psi
			mm	mm	mm	mm	mm		
AMO06ME06L.1	9/16	12X1.5	17	10	10.5	17.5	6	315	4568
AMO06ME08L.1	9/16	14X1.5	17	10	10.5	17.5	8	315	4568
AMO09ME10L.1	11/16	16X1.5	19	11	13	20	10	315	4568
AMO11ME12L.1	13/16	18X1.5	22	13	13.5	20.5	12	315	4568
AMO13ME15L.1	1	22X1.5	27	15.5	16.5	23.5	15	315	4568
AMO14ME18L.1	1.3/16	26X1.5	32	17	17.5	25	18	315	4568
AMO15ME22L.1	1.7/16	30X2	41	17.5	21	28.5	22	160	2320
AMO21ME28L.1	1.11/16	36X2	46	17.5	23	30.5	28	160	2320
AMO32ME35L.1	2	45X2	55	17.5	23.5	34	35	160	2320
AMO32ME42L.1	2	52X2	55	17.5	23	34	42	160	2320
AMO06ME06S.1	9/16	14X1.5	17	10	12.5	19.5	6	630	9136
AMO06ME08S.1	9/16	16X1.5	17	10	12.5	19.5	8	630	9136
AMO09ME10S.1	11/16	18X1.5	19	11	13.5	21	10	630	9136
AMO11ME12S.1	13/16	20X1.5	22	13	14	21.5	12	630	9136
AMO13ME14S.1	1	22X1.5	27	15.5	19.5	28.5	14	420	6091
AMO13ME16S.1	1	24X1.5	27	15.5	20	28.5	16	400	5801
AMO14ME20S.1	1.3/16	30X2	32	17	18.5	29	20	400	5801
AMO15ME25S.1	1.7/16	36X2	41	17.5	20.5	31.5	25	400	5801
AMO21ME30S.1	1.11/16	42X2	46	17.5	23	36.5	30	280	4060
AMO32ME38S.1	2	52X2	55	17.5	24	40	38	280	4060

ADAPTOR MALE ORFS - FEMALE DIN (THRUST-WIRE NUT)




ADATTATORE DIRITTO MASCHIO ORFS FEMMINA DIN DADO SPINATO
 ADAPTATEUR MÂLE ORFS - FEMELLE DIN (ÉCROU À JONC)
 ADAPTER AG-ORFS/IG-DIN (GESTIFTETE ÜBERWURF MUTTER)
 ADAPTADOR MACHO ORFS -HEMBRA DIN (TUERCA CON SEGURO)

F1 ORFS

F2 DIN

Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	L1	L2	T	Bar	Psi
			mm	mm	mm	mm	mm		
AM006FE06L	9/16	12X1.5	17	14	10	24.5	6	315	4568
AM006FE08L	9/16	14X1.5	17	17	10	24.5	8	315	4568
AM009FE10L	11/16	16X1.5	19	19	11	26.5	10	315	4568
AM011FE12L	13/16	18X1.5	22	22	13	27	12	315	4568
AM013FE15L	1	22X1.5	27	27	15.5	31	15	315	4568
AM014FE18L	1.3/16	26X1.5	32	32	17	33.5	18	315	4568
AM015FE22L	1.7/16	30X2	41	36	17.5	36	22	160	2320
AM021FE28L	1.11/16	36X2	46	41	17.5	39	28	160	2320
AM032FE35L	2	45X2	55	50	17.5	45	35	160	2320
AM032FE42L	2	52X2	55	60	17.5	45	42	160	2320
AM006FE06S	9/16	14X1.5	17	17	10	24.5	6	630	9136
AM006FE08S	9/16	16X1.5	17	19	10	25	8	630	9136
AM009FE10S	11/16	18X1.5	19	22	11	27	10	630	9136
AM011FE12S	13/16	20X1.5	22	24	13	27.5	12	630	9136
AM013FE14S	1	22X1.5	27	27	15.5	32.5	14	420	6091
AM013FE16S	1	24X1.5	27	30	15.5	35	16	400	5801
AM014FE20S	1.3/16	30X2	32	36	17	39	20	400	5801
AM015FE25S	1.7/16	36X2	41	46	17.5	43	25	400	5801
AM021FE30S	1.11/16	42X2	46	50	17.5	47.5	30	280	4060
AM032FE38S	2	52X2	55	60	17.5	51	38	280	4060

ADAPTOR MALE ORFS - MALE JIC



ADATTATORE DIRITTO MASCHIO ORFS MASCHIO JIC (SAE J514)

ADAPTATEUR MÂLE ORFS - MÂLE JIC

ADAPTER AG-ORFS/AG-JIC


ADAPTADOR MACHO ORFS -MACHO JIC

F1 ORFS

F2 JIC

Code	Thread		Dimensions				Pressure	
	F1	F2	H	L1	L2	L	Bar	Psi
			mm	mm	mm	mm		
AMO06MJ04	9/16	7/16	17	10	14	31.5	450	6526
AMO09MJ06	11/16	9/16	19	11	14.1	34	350	5076
AMO11MJ08	13/16	3/4	22	13	16.7	39	350	5076
AMO13MJ10	1	7/8	27	15.5	19.3	46.5	350	5076
AMO14MJ12	1.3/16	1.1/16	32	17	21.9	52	350	5076
AMO15MJ16	1.7/16	1.5/16	41	17.5	23.1	55	290	4205
AMO21MJ20	1.11/16	1.5/8	46	17.5	24.3	58.5	240	3480
AMO32MJ24	2	1.7/8	55	17.5	27.5	63	240	3480
AMO09MJ05	11/16	1/2	19	11	14	34	450	6526

ADAPTOR MALE ORFS - FEMALE JIC



ADATTATORE DIRITTO MASCHIO ORFS FEMMINA JIC
ADAPTATEUR MÂLE ORFS - FEMELLE JIC
ADAPTER AG-ORFS/IG-JIC
ADAPTADOR MACHO ORFS -HEMBRA JIC

F1 ORFS

F2 JIC

Code	Thread		Dimensions				Pressure		
	F1	F2	H1	H2	L1	L2	form	Bar	Psi
			mm	mm	mm	mm			
AM006FGJ04	9/16	7/16	17	17	10	25	X	450	6526
AM009FGJ06	11/16	9/16	19	19	11	29	X	350	5076
AM011FGJ08	13/16	3/4	22	22	13	31.5	X	350	5076
AM013FGJ10	1	7/8	27	27	15.5	37.5	X	350	5076
AM014FGJ12	1.3/16	1.1/16	32	32	17	39	Y	350	5076
AM015FGJ16	1.7/16	1.5/16	41	41	17.5	44.5	Y	290	4205
AM021FGJ20	1.11/16	1.5/8	46	50	17.5	45.5	Y	240	3480
AM032FGJ24	2	1.7/8	55	60	17.5	55.5	Y	240	3480
AM009FGJ05	11/16	1/2	19	17	11	28	Y	450	6526


Y: Version with crimped nut

Versione con dado pressato

X: Version with thrust-wire nut

Versione con dado spinato

ADAPTOR FEMALE ORFS - MALE JIC




ADATTATORE DIRITTO FEMMINA ORFS MASCHIO JIC (SAE J514)
 ADAPTATEUR FEMELLE ORFS - MÂLE JIC
 ADAPTER IG-ORFS/AG-JIC
 ADAPTADOR HEMBRA ORFS - MACHO JIC

F1 ORFS

F2 JIC

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
AFGO06MJ04	9/16	7/16	17	17	23.5	14	450	6526
AFGO09MJ06	11/16	9/16	22	22	26.9	14.1	350	5076
AFGO11MJ08	13/16	3/4	24	24	30.3	16.7	350	5076
AFGO13MJ10	1	7/8	30	30	36.7	19.3	350	5076
AFGO14MJ12	1.3/16	1.1/16	36	36	40.6	21.9	350	5076
AFGO15MJ16	1.7/16	1.5/16	41	41	42.9	23.1	290	4205
AFGO21MJ20	1.11/16	1.5/8	50	50	44.7	24.3	240	3480
AFGO32MJ24	2	1.7/8	60	60	46.5	27.5	240	3480
AFGO09MJ05	11/16	1/2	22	22	27	14	450	6526

WELDING ADAPTOR MALE ORFS (1)



ADATTATORE DIRITTO A SILDARE MASCHIO ORFS CON TASCA
 ADAPTATEUR À SOUDER ORFS
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSEITEM
 LOCHANSATZ- AG-ORFS
 ADAPTADOR MACHO SOLDABLE OR


F1 ORFS

T Ø

N.b.: No zinc-plated Parts
 Elementi non sottoposti al trattamento di zincatura

Code	Thread	Dimensions					Pressure	
		F1	H	L1	L2	D	D	
			mm	mm	mm	mm	in	Bar Psi
AMNSO06T6	9/16		17	22	10	6	1/4	630 9136
AMNSO09T10	11/16		19	23	11	10	3/8	630 9136
AMNSO11T12	13/16		22	24.5	13	12	1/2	630 9136
AMNSO13T16	1		27	28	15.5	16	5/8	420 6091
AMNSO14T20	1.3/16		32	33.5	17	20	3/4	420 6091
AMNSO15T25	1.7/16		41	38.5	17.5	25	1	420 6091
AMNSO21T30	1.11/16		46	38.5	17.5	30	1.1/4	280 4060
AMNSO32T38	2		55	38.5	17.5	38	1.1/2	280 4060
AMNSO06T8	9/16		17	22	10	8	5/16	630 9136
AMNSO06T10	9/16		17	22	10	10	3/8	630 9136
AMNSO06T12	9/16		19	22	10	12	1/2	630 9136
AMNSO09T6	11/16		19	23	11	6	1/4	630 9136
AMNSO09T8	11/16		19	23	11	8	5/16	630 9136
AMNSO09T12	11/16		19	23	11	12	1/2	630 9136
AMNSO09T14	11/16		22	23.5	11	14	-	420 6091
AMNSO09T15	11/16		22	23.5	11	15	-	420 6091
AMNSO09T16	11/16		22	23.5	11	16	5/8	420 6091
AMNSO11T6	13/16		22	24.5	13	6	1/4	630 9136
AMNSO11T8	13/16		22	24.5	13	8	5/16	630 9136
AMNSO11T10	13/16		22	24.5	13	10	3/8	630 9136
AMNSO11T14	13/16		22	25	13	14	-	420 6091
AMNSO11T15	13/16		22	25	13	15	-	420 6091

WELDING ADAPTOR MALE ORFS (2)



ADATTATORE DIRITTO A SALDARE MASCHIO ORFS CON TASCA
 ADAPTATEUR À SOUDER ORFS
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSETEM
 LOCHANSATZ- AG-ORFS
 ADAPTADOR MACHO SOLDABLE OR

F1 ORFS


T

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

Code	Thread	Dimensions					Pressure	
		F1	H	L1	L2	D	D	
			mm	mm	mm	mm	in	Bar Psi
AMNSO11T16	13/16		22	25	13	16	5/8	420 6091
AMNSO11T18	13/16		27	28.5	13	18	-	420 6091
AMNSO11T20	13/16		27	28.5	13	20	3/4	420 6091
AMNSO11T22	13/16		32	28.5	13	22	7/8	420 6091
AMNSO11T25	13/16		32	30	13	25	1	420 6091
AMNSO13T10	1		27	27.5	15.5	10	3/8	420 6091
AMNSO13T12	1		27	27.5	15.5	12	1/2	420 6091
AMNSO13T14	1		27	28	15.5	14	-	420 6091
AMNSO13T15	1		27	28	15.5	15	-	420 6091
AMNSO13T18	1		27	31.5	15.5	18	-	420 6091
AMNSO13T20	1		27	31.5	15.5	20	3/4	420 6091
AMNSO14T12	1.3/16		32	29.5	17	12	1/2	420 6091
AMNSO14T14	1.3/16		32	30	17	14	-	420 6091
AMNSO14T15	1.3/16		32	30	17	15	-	420 6091
AMNSO14T16	1.3/16		32	30	17	16	5/8	420 6091
AMNSO14T18	1.3/16		32	33.5	17	18	-	420 6091
AMNSO14T22	1.3/16		32	33.5	17	22	7/8	420 6091
AMNSO14T25	1.3/16		32	35	17	25	1	420 6091
AMNSO15T12	1.7/16		41	33	17.5	12	1/2	420 6091
AMNSO15T14	1.7/16		41	33.5	17.5	14	-	420 6091
AMNSO15T15	1.7/16		41	33.5	17.5	15	-	420 6091
AMNSO15T16	1.7/16		41	33.5	17.5	16	5/8	420 6091

WELDING ADAPTOR MALE ORFS (3)



ADATTATORE DIRITTO A SILDARE MASCHIO ORFS CON TASCA
 ADAPTEUR À SOUDER ORFS
 SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE MIT VERGROSSEITEM
 LOCHANSATZ- AG-ORFS
 ADAPTADOR MACHO SOLDABLE OR


F1 ORFS

T

N.b.: No zinc-plated Parts
 Elementi non sottoposti al trattamento di zincatura

Code	Thread	Dimensions					Pressure	
		F1	H	L1	L2	T	T	
			mm	mm	mm	mm	in	Bar Psi
AMNSO15T18	1.7/16		41	37	17.5	18	-	420 6091
AMNSO15T20	1.7/16		41	37	17.5	20	3/4	420 6091
AMNSO15T22	1.7/16		41	37	17.5	22	7/8	420 6091
AMNSO15T28	1.7/16		41	38.5	17.5	28	-	280 4060
AMNSO15T30	1.7/16		41	38.5	17.5	30	1.1/4	280 4060
AMNSO15T32	1.7/16		41	38.5	17.5	32	-	280 4060
AMNSO21T18	1.11/16		46	37	17.5	18	-	280 4060
AMNSO21T20	1.11/16		46	37	17.5	20	3/4	280 4060
AMNSO21T22	1.11/16		46	37	17.5	22	7/8	280 4060
AMNSO21T25	1.11/16		46	38.5	17.5	25	1	280 4060
AMNSO21T28	1.11/16		46	38.5	17.5	28	-	280 4060
AMNSO21T32	1.11/16		46	38.5	17.5	32	-	280 4060
AMNSO21T35	1.11/16		50	38.5	17.5	35	-	280 4060
AMNSO21T38	1.11/16		50	38.5	17.5	38	1.1/2	280 4060
AMNSO32T25	2		55	38.5	17.5	25	1	280 4060
AMNSO32T28	2		55	38.5	17.5	28	-	280 4060
AMNSO32T30	2		55	38.5	17.5	30	1.1/4	280 4060
AMNSO32T32	2		55	38.5	17.5	32	-	280 4060
AMNSO32T35	2		55	38.5	17.5	35	-	280 4060

WELDING ADAPTOR MALE ORFS



CODOLO A SILDARE
EMBOUT À SOUDER
SCHWEISSVERBINDUNG FÜR HYDRAULIKROHRE
EMPALME SOLDABLE


F1 ORFS

T

N.b.: No zinc-plated Parts
Elementi non sottoposti al trattamento di zincatura

	Code	Thread	Dimensions				Pressure	
		F1	D1	L1	D	D		
			mm	mm	in	mm	Bar	Psi
	T006W	1.7/16	12.75	25	1/4	6	630	9136
	T010W	1.7/16	15.75	26	3/8	10	630	9136
	T012W	1.7/16	18.9	26	1/2	12	630	9136
	T016W	1.7/16	23.45	32	5/8	16	420	6091
	T020W	1.7/16	17.85	37	3/4	20	420	6091
	T025W	1.7/16	34.2	42	1	25	420	6091
	T030W	1.11/16	40.55	44	1.1/4	30	280	4060
	T038W	1.11/16	48.5	49	1.1/2	38	280	4060
	T008W	1.11/16	15.75	25	5/16	8	630	9136
	T014W	1.11/16	23.45	32	-	14	420	6091
	T015W	1.11/16	23.45	32	-	15	420	6091
	T018W	1.11/16	17.85	37	-	18	420	6091
	T022W	1.11/16	34.2	37	7/8	22	420	6091
	T028W	1.11/16	40.55	44	-	28	280	4060
	T032W	2	40.55	44	-	32	280	4060
	T035W	2	48.5	44	-	35	280	4060

90° ADAPTOR MALE ORFS - BUTT WELD



GOMITO 90° MASCHIO ORFS ESTREMITÀ A SALDARE
ADAPTATEUR COUDE 90° À SOUDER MÂLE ORFS
ADAPTER ANSCHWEISSWINKEL 90° GSK – AG-ORFS
ADAPTADOR CODO 90° SOLDABLE MACHO ORFS


F1 ORFS

N.b.: No zinc-plated Parts

Elementi non sottoposti al trattamento di zincatura

Code	Thread		Dimensions			Pressure	
	F1	Ø	H	L1	L2	Bar	Psi
			mm	mm	mm		
LM006W6	9/16	6	14	21.5	20	630	9136
LM009W10	11/16	10	19	25	25	630	9136
LM011W12	13/16	12	22	28	25	630	9136
LM013W16	1	16	27	33.5	33.5	420	6091
LM014W20	1.3/16	20	30	37.5	37.5	420	6091
LM015W25	1.7/16	25	36	41.5	42	420	6091
LM021W30	1.11/16	30	41	44.5	45	280	4060
LM032W38	2	38	48	49	61	280	4060
LM009W8	11/16	8	19	25	25	630	9136
LM013W14	1	14	27	33.5	33.5	420	6091
LM013W15	1	15	27	33.5	33.5	420	6091
LM014W18	1.3/16	18	30	37.5	37.5	420	6091
LM015W22	1.7/16	22	36	41.5	42	420	6091
LM021W28	1.11/16	28	41	44.5	45	280	4060
LM021W32	1.11/16	32	41	44.5	45	280	4060
LM032W35	2	35	48	49	61	280	4060

90° ADAPTOR FEMALE ORFS - SIDE FEMALE TO WELD




GOMITO 90° FEMMINA ORFS ESTREMITÀ A SALDARE
ADAPTATEUR COUDE 90° À SOUDER FEMÂLE ORFS
ADAPTER ORFS ANSCHWEISSWINKEL 90° GSK
ADAPTADOR ORFS CODO 90° HEMBRA SOLDABLE

F1 ORFS

N.b.: No zinc-plated Parts
Elementi non sottoposti al trattamento di zincatura

Code	Thread		Dimensions			Pressure	
	F1	Ø	H	L1	L2	Bar	Psi
			mm	mm	mm		
LM006T6	9/16	6	14	21.5	20	630	9136
LM009T10	11/16	10	19	25	23	630	9136
LM011T12	13/16	12	22	28	25	630	9136
LM013T16	1	16	27	33.5	30	420	6091
LM014T20	1.3/16	20	30	37.5	32	420	6091
LM015T25	1.7/16	25	36	41.5	36	420	6091
LM021T30	1.11/16	30	41	44.5	42	280	4060
LM032T38	2	38	48	49	44	280	4060
LM009T8	11/16	8	19	25	23	630	9136
LM013T14	1	14	27	33.5	30	420	6091
LM013T15	1	15	27	33.5	30	420	6091
LM014T18	1.3/16	18	30	37.5	32	420	6091
LM015T22	1.7/16	22	36	41.5	36	420	6091
LM021T28	1.11/16	28	41	44.5	42	280	4060
LM021T32	1.11/16	32	41	44.5	42	280	4060
LM032T35	2	35	48	49	44	280	4060

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (1)




GOMITO 90° MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS– MÂLE BSPP
ADAPTER 90° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
CODO 90° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilindrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM006MOG02	9/16	1/8	14	14	21.5	30	350	5076
LM009MOG04	11/16	1/4	19	19	25	37	315	4568
LM011MOG06	13/16	3/8	22	22	28	38	250	3625
LM013MOG08	1	1/2	27	27	33.5	48	250	3625
LM014MOG12	1.3/16	3/4	30	36	37.5	51.5	250	3625
LM015MOG16	1.7/16	1	36	41	41.5	58.5	200	2900
LM021MOG20	1.11/16	1.1/4	41	50	52	60.5	200	2900
LM032MOG24	2	1.1/2	48	55	49	64	160	2320
LM006MOG04	9/16	1/4	14	19	21.5	35	315	4568
LM006MOG06	9/16	3/8	19	22	23.5	38	250	3625
LM009MOG06	11/16	3/8	19	22	25	38	250	3625
LM009MOG08	11/16	1/2	22	27	28	48	250	3625
LM011MOG04	13/16	1/4	22	19	28	37	315	4568
LM011MOG08	13/16	1/2	22	27	30	48	250	3625
LM011MOG12	13/16	3/4	27	36	31.5	51.5	250	3625
LM013MOG04	1	1/4	27	19	33.5	42.5	315	4568
LM013MOG06	1	3/8	27	22	33.5	42.5	250	3625
LM013MOG12	1	3/4	27	36	33.5	51.5	250	3625

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (2)




GOMITO 90° MASCHIO ORFS MASCHIO GAS CILINDRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS– MÂLE BSPP
 ADAPTER 90° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 90° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM013MOG16	1	1	33	41	37	58.5	200	2900
LM014MOG04	1.3/16	1/4	30	19	37.5	43.5	315	4568
LM014MOG08	1.3/16	1/2	30	27	37.5	49	250	3625
LM014MOG16	1.3/16	1	33	41	42	55	200	2900
LM015MOG04	1.7/16	1/4	36	19	41.5	52	315	4568
LM015MOG12	1.7/16	3/4	36	36	41.5	57.5	250	3625
LM015MOG20	1.7/16	1.1/4	41	50	50	60.5	200	2900
LM021MOG16	1.11/16	1	41	41	52	60.5	200	2900
LM021MOG24	1.11/16	1.1/2	48	55	43.5	67	160	2320

90° ADJUSTABLE ADAPTOR MALE ORFS – METRIC MALE WITH O-RING




GOMITO 90° MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE MÉTRIQUE
 AVEC RONDELLE D'ÉTANCHÉITÉ ET O-RING
 ADAPTER 90° GSK – AG-ORFS / AGR METRISCH MIT O.R. UND HATTER
 CODO 90° ORIENTABLE MACHO ORFS – MACHO MÉTRICO CON ARANDELA

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM006MOM12R	9/16	12X1.5	14	17	21.5	33	315	4568
LM009MOM14R	11/16	14X1.5	19	19	25	35.5	315	4568
LM011MOM18R	13/16	18X1.5	22	24	28	41	315	4568
LM013MOM22R	1	22X1.5	27	27	33.5	49	250	3625
LM014MOM27R	1.3/16	27X2	30	32	37.5	55.5	250	3625
LM015MOM33R	1.7/16	33X2	36	41	41.5	59.5	160	2320
LM021MOM42R	1.11/16	42X2	41	50	52	63	160	2320
LM032MOM48R	2	48X2	48	55	49	68.5	160	2320
LM006MOM10R	9/16	10X1	14	14	21.5	30	315	4568
LM009MOM16R	11/16	16X1.5	19	22	25	37.5	315	4568
LM011MOM16R	13/16	16X1.5	22	22	28	37.5	315	4568
LM011MOM22R	13/16	22X1.5	27	27	31.5	49	250	3625
LM013MOM18R	1	18X1.5	27	24	33.5	47.5	315	4568
LM013MOM27R	1	27X2	27	32	33.5	55.5	250	3625
LM014MOM22R	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
LM014MOM33R	1.3/16	33X2	33	41	38	59.5	160	2320
LM015MOM27R	1.7/16	27X2	36	32	41.5	59.5	250	3625
LM015MOM42R	1.7/16	42X2	41	50	44.5	63	160	2320
LM021MOM48R	1.11/16	48X2	48	55	52	68.5	160	2320

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (1)




GOMITO 90° MASCHIO ORFS MASCHIO UNF ORIENTABILE CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE UNFADAPTER
 90° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 90° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM006MOU04	9/16	7/16	14	14	21.5	32.5	420	6091
LM009MOU06	11/16	9/16	19	17	25	37	420	6091
LM011MOU08	13/16	3/4	22	22	28	40.5	420	6091
LM013MOU10	1	7/8	27	27	33.5	50	420	6091
LM014MOU12	1.3/16	1.1/16	30	32	37.5	55	420	6091
LM015MOU16	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
LM021MOU20	1.11/16	1.5/8	41	50	52	62	280	4060
LM032MOU24	2	1.7/8	48	55	49	66	280	4060
LM006MOU06	9/16	9/16	14	17	21.5	34.5	420	6091
LM006MOU08	9/16	3/4	19	22	23.5	40.5	420	6091
LM009MOU04	11/16	7/16	19	14	25	35	420	6091
LM009MOU08	11/16	3/4	19	22	25	40.5	420	6091
LM009MOU10	11/16	7/8	22	27	28	50	420	6091
LM009MOU12	11/16	1.1/16	27	32	29.5	55	420	6091
LM011MOU06	13/16	9/16	22	17	28	37	420	6091
LM011MOU10	13/16	7/8	22	27	30	50	420	6091
LM011MOU12	13/16	1.1/16	27	32	31.5	55	420	6091

90° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (2)




GOMITO 90° MASCHIO ORFS MASCHIO UNF ORIENTABILE CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 90° MÂLE ORFS – MÂLE UNFADAPTER
 90° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 90° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
LM013MOU08	1	3/4	27	22	33.5	46	420	6091
LM013MOU12	1	1.1/16	27	32	33.5	55	420	6091
LM014MOU08	1.3/16	3/4	30	22	37.5	47	420	6091
LM014MOU10	1.3/16	7/8	30	27	37.5	51	420	6091
LM014MOU16	1.3/16	1.5/16	33	41	38	59.5	380	5511
LM015MOU12	1.7/16	1.1/16	36	32	41.5	59	420	6091
LM015MOU20	1.7/16	1.5/8	41	50	44.5	62	280	4060
LM021MOU16	1.11/16	1.5/16	41	41	52	62	280	4060
LM021MOU24	1.11/16	1.7/8	48	55	52	66	280	4060
LM032MOU20	2	1.5/8	48	50	49	66	280	4060

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (1)




GOMITO 45° MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS- MÂLE BSPP
ADAPTER 45° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
CODO 45° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilindra

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QMO06MOG02	9/16	1/8	14	14	16	27.5	350	5076
QMO09MOG04	11/16	1/4	19	19	19	32.5	315	4568
QMO11MOG06	13/16	3/8	22	22	20.5	33.5	250	3625
QMO13MOG08	1	1/2	27	27	23.5	43	250	3625
QMO14MOG12	1.3/16	3/4	30	36	26	46.5	250	3625
QMO15MOG16	1.7/16	1	36	41	30	51	200	2900
QMO21MOG20	1.11/16	1.1/4	41	50	32	52.5	200	2900
QMO32MOG24	2	1.1/2	48	55	37	52.5	160	2320
QMO06MOG04	9/16	1/4	14	19	16	31.5	315	4568
QMO06MOG06	9/16	3/8	19	22	17.5	33.5	250	3625
QMO09MOG06	11/16	3/8	19	22	19	33.5	250	3625
QMO09MOG08	11/16	1/2	22	27	20	43	250	3625
QMO11MOG04	13/16	1/4	22	19	20.5	32.5	315	4568
QMO11MOG08	13/16	1/2	22	27	21	43	250	3625
QMO11MOG12	13/16	3/4	27	36	21.5	46.5	250	3625
QMO13MOG04	1	1/4	27	19	23.5	36	315	4568
QMO13MOG06	1	3/8	27	22	23.5	37	250	3625
QMO13MOG12	1	3/4	27	36	23.5	46.5	250	3625

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE BSPP WITH O-RING (2)




GOMITO 45° MASCHIO ORFS MASCHIO GAS CILINDRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS- MÂLE BSPP
 ADAPTER 45° GSK – AG-ORFS/ AGR-F MIT O.R. UND HALTER
 CODO 45 ° ORIENTABLE MACHO ORFS – MACHO BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
 Gas cilindrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QMO13MOG16	1	1	33	41	28.5	51	200	2900
QMO14MOG04	1.3/16	1/4	30	19	26	40.5	315	4568
QMO14MOG08	1.3/16	1/2	30	27	26	44.5	250	3625
QMO14MOG16	1.3/16	1	33	41	29.5	51	200	2900
QMO15MOG04	1.7/16	1/4	36	19	30	41	315	4568
QMO15MOG12	1.7/16	3/4	36	36	30	47	250	3625
QMO15MOG20	1.7/16	1.1/4	41	50	32	52.5	200	2900
QMO21MOG16	1.11/16	1	41	41	32	52.5	200	2900
QMO21MOG24	1.11/16	1.1/2	48	55	35.5	52.5	160	2320

45° ADJUSTABLE ADAPTOR MALE ORFS – METRIC MALE WITH O-RING




GOMITO 45° MASCHIO ORFS MASCHIO METRICO CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE MÉTRIQUE
 AVEC RONDELLE D'ÉTANCHÉITÉ ET O-RING
 ADAPTER 45° GSK – AG-ORFS / AGR METRISCH MIT O.R. UND HATTER
 CODO 45° ORIENTABLE MACHO ORFS – MACHO MÉTRICO CON ARANDELA

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QMO06MOM12R	9/16	12X1.5	14	17	16	30	315	4568
QMO09MOM14R	11/16	14X1.5	19	19	19	31	315	4568
QMO11MOM18R	13/16	18X1.5	22	24	20.5	36.5	315	4568
QMO13MOM22R	1	22X1.5	27	27	23.5	44	250	3625
QMO14MOM27R	1.3/16	27X2	30	32	26	50	250	3625
QMO15MOM33R	1.7/16	33X2	36	41	30	52.5	250	3625
QMO21MOM42R	1.11/16	42X2	41	50	32	54	160	2320
QMO32MOM48R	2	48X2	48	55	37	56.5	160	2320
QMO06MOM10R	9/16	10X1	14	14	16	27	315	4568
QMO09MOM16R	11/16	16X1.5	19	22	19	33	315	4568
QMO11MOM16R	13/16	16X1.5	22	22	20.5	33	315	4568
QMO11MOM22R	13/16	22X1.5	27	27	21.5	44	250	3625
QMO13MOM18R	1	18X1.5	27	24	23.5	42.5	315	4568
QMO13MOM27R	1	27X2	27	32	23.5	50	250	3625
QMO14MOM22R	1.3/16	22X1.5	30	27	26	44	250	3625
QMO14MOM33R	1.3/16	33X2	33	41	29.5	52.5	160	2320
QMO15MOM27R	1.7/16	27X2	36	32	30	52.5	250	3625
QMO15MOM42R	1.7/16	42X2	41	50	32	54	160	2320
QMO21MOM48R	1.11/16	48X2	48	55	35.5	56.5	160	2320

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (1)




GOMITO 45° MASCHIO ORFS MASCHIO ORIENTABILE UNF CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE UNF
 ADAPTER 45° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 45° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QMO06MOU04	9/16	7/16	14	14	16	30	420	6091
QMO09MOU06	11/16	9/16	19	17	19	33	420	6091
QMO11MOU08	13/16	3/4	22	22	20.5	36.5	420	6091
QMO13MOU10	1	7/8	27	27	23.5	45	420	6091
QMO14MOU12	1.3/16	1.1/16	30	32	26	50	420	6091
QMO15MOU16	1.7/16	1.5/16	36	41	30	52.5	380	5511
QMO21MOU20	1.11/16	1.5/8	41	50	32	53.5	280	4060
QMO32MOU24	2	1.7/8	48	55	37	53.5	280	4060
QMO06MOU06	9/16	9/16	14	17	16	33	420	6091
QMO06MOU08	9/16	3/4	19	22	17.5	36.5	420	6091
QMO09MOU04	11/16	7/16	19	14	19	31	420	6091
QMO09MOU08	11/16	3/4	19	22	19	36.5	420	6091
QMO09MOU10	11/16	7/8	22	27	20	45	420	6091
QMO09MOU12	11/16	1.1/16	27	32	19.5	50	420	6091
QMO11MOU06	13/16	9/16	22	17	20.5	32.5	420	6091
QMO11MOU10	13/16	7/8	22	27	21	45	420	6091
QMO11MOU12	13/16	1.1/16	27	32	21.5	50	420	6091

45° ADJUSTABLE ADAPTOR MALE ORFS – MALE UNF WITH O-RING (2)




GOMITO 45° MASCHIO ORFS MASCHIO ORIENTABILE UNF CON O-RING
 ADAPTATEUR ORIENTABLE COUDE 45° MÂLE ORFS – MÂLE UNF
 ADAPTER 45° GSK-AG-ORFS / AG-UNF MIT O.R.
 CODO 45° ORIENTABLE MACHO ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
QMO13MOU08	1	3/4	27	22	23.5	40.5	420	6091
QMO13MOU12	1	1.1/16	27	32	23.5	50	420	6091
QMO14MOU08	1.3/16	3/4	30	22	26	40.5	420	6091
QMO14MOU10	1.3/16	7/8	30	27	26	46	420	6091
QMO14MOU16	1.3/16	1.5/16	33	41	29.5	52.5	380	5511
QMO15MOU12	1.7/16	1.1/16	36	32	30	51.5	420	6091
QMO15MOU20	1.7/16	1.5/8	41	50	32	53.5	280	4060
QMO21MOU16	1.11/16	1.5/16	41	41	32	53.5	280	4060
QMO21MOU24	1.11/16	1.7/8	48	55	35.5	53.5	280	4060
QMO32MOU20	2	1.5/8	48	50	37	53.5	280	4060

RUN TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH WITH O-RING (1)

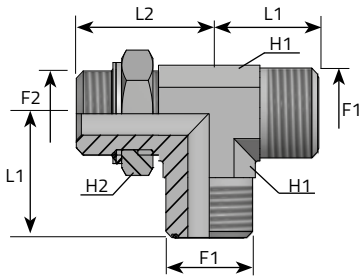


RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTOR TÊR EVERSE MÂLE ORFS - MÂLE ORIENTABLE BSPP
ADAPTER T-STUCK 2XAG-ORFS / AGR- F MIT O.R. UND HALTER
ADAPTADOR EN L MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TMO06MOG02B	9/16	1/8	14	14	21.5	30	350	5076
TMO09MOG04B	11/16	1/4	19	19	25	37	315	4568
TMO11MOG06B	13/16	3/8	22	22	28	38	250	3625
TMO13MOG08B	1	1/2	27	27	33.5	48	250	3625
TMO14MOG12B	1.3/16	3/4	30	36	37.5	51.5	250	3625
TMO15MOG16B	1.7/16	1	36	41	41.5	58.5	200	2900
TMO21MOG20B	1.11/16	1.1/4	41	50	44.5	60.5	200	2900
TMO32MOG24B	2	1.1/2	48	55	49	64	160	2320
TMO06MOG04B	9/16	1/4	14	19	21.5	35	315	4568
TMO06MOG06B	9/16	3/8	19	22	23.5	38	250	3625
TMO09MOG06B	11/16	3/8	19	22	25	38	250	3625
TMO09MOG08B	11/16	1/2	22	27	28	48	250	3625
TMO11MOG04B	13/16	1/4	22	19	28	37	315	4568
TMO11MOG08B	13/16	1/2	22	27	30	48	250	3625
TMO11MOG12B	13/16	3/4	27	36	31.5	51.5	250	3625
TMO13MOG04B	1	1/4	27	19	33.5	42.5	315	4568
TMO13MOG06B	1	3/8	27	22	33.5	42.5	250	3625
TMO13MOG12B	1	3/4	27	36	33.5	51.5	250	3625

RUN TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH WITH O-RING (2)

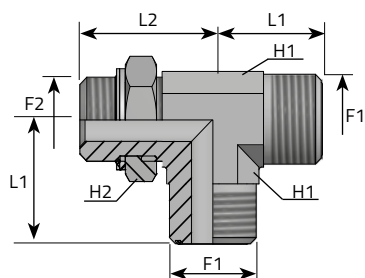


RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTOR TÈR EVERSÈ MÂLE ORFS - MÂLE ORIENTABLE BSPP
ADAPTER T-STUCK 2XAG-ORFS / AGR- F MIT O.R. UND HALTER
ADAPTADOR EN L MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TMO13MOG16B	1	1	33	41	37	58.5	200	2900
TMO14MOG04B	1.3/16	1/4	30	19	37.5	43.5	315	4568
TMO14MOG08B	1.3/16	1/2	30	27	37.5	49	250	3625
TMO14MOG16B	1.3/16	1	33	41	42	54	200	2900
TMO15MOG04B	1.7/16	1/4	36	19	41.5	52	315	4568
TMO15MOG12B	1.7/16	3/4	36	36	41.5	57.5	250	3625
TMO15MOG20B	1.7/16	1.1/4	41	50	44.5	60.5	200	2900
TMO21MOG16B	1.11/16	1	41	41	44.5	60.5	200	2900
TMO21MOG24B	1.11/16	1.1/2	48	55	48.5	64	160	2320

RUN TEE MALE ORFS - ADJUSTABLE METRIC MALE WITH O-RING

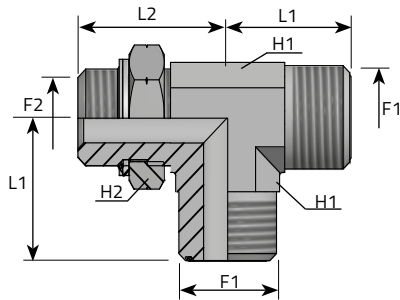


RACCORDO A "T" MASCHIO ORFS MASCHIO METRICO ORIENTABILE
ADAPTOR TÊ RENVERSÉ MÂLE ORFS - MÂLE ORIENTABLE MÉTRIQUE
ADAPTER T-STUCK 2XAG-ORFS/ AG-METRISCH MIT O.R. UND HALTER
ADAPTADOR EN L MACHO ORFS - MACHO MÉTRICO ORIENTABLE

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TMO06MOM12RB	9/16	12X1.5	14	17	21.5	33	315	4568
TMO09MOM14RB	11/16	14X1.5	19	19	25	35.5	315	4568
TMO11MOM18RB	13/16	18X1.5	22	24	28	41	315	4568
TMO13MOM22RB	1	22X1.5	27	27	33.5	49	250	3625
TMO14MOM27RB	1.3/16	27X2	30	32	37.5	55.5	250	3625
TMO15MOM33RB	1.7/16	33X2	36	41	41.5	59.5	160	2320
TMO21MOM42RB	1.11/16	42X2	41	50	44.5	63	160	2320
TMO32MOM48RB	2	48X2	48	55	49	68.5	160	2320
TMO06MOM10RB	9/16	10X1	14	14	21.5	30	315	4568
TMO09MOM16RB	11/16	16X1.5	19	22	25	37.5	315	4568
TMO11MOM16RB	13/16	16X1.5	22	22	28	37.5	315	4568
TMO11MOM22RB	13/16	22X1.5	27	27	31.5	49	250	3625
TMO13MOM18RB	1	18X1.5	27	24	33.5	47.5	315	4568
TMO13MOM27RB	1	27X2	27	32	33.5	55.5	250	3625
TMO14MOM22RB	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
TMO14MOM33RB	1.3/16	33X2	33	41	38	59.5	160	2320
TMO15MOM27RB	1.7/16	27X2	36	32	41.5	59.5	250	3625
TMO15MOM42RB	1.7/16	42X2	41	50	44.5	63	160	2320
TMO21MOM48RB	1.11/16	48X2	48	55	48.5	68.5	160	2320

RUN TEE MALE ORFS - MALE UNF WITH O-RING (1)

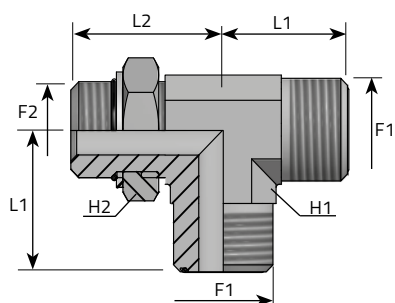


RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL BRACCIO
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS - MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM006MOU04B	9/16	7/16	14	14	21.5	32.5	420	6091
TM009MOU06B	11/16	9/16	19	17	25	37	420	6091
TM011MOU08B	13/16	3/4	22	22	28	40.5	420	6091
TM013MOU10B	1	7/8	27	27	33.5	50	420	6091
TM014MOU12B	1.3/16	1.1/16	30	32	37.5	55	420	6091
TM015MOU16B	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
TM021MOU20B	1.11/16	1.5/8	41	50	44.5	62	280	4060
TM032MOU24B	2	1.7/8	48	55	49	66	280	4060
TM006MOU06B	9/16	9/16	14	17	21.5	34.5	420	6091
TM006MOG08B	9/16	3/4	19	22	23.5	40.5	420	6091
TM009MOU04B	11/16	7/16	19	14	25	35	420	6091
TM009MOU08B	11/16	3/4	19	22	25	40.5	420	6091
TM009MOU10B	11/16	7/8	22	27	28	50	420	6091
TM009MOU12B	11/16	1.1/16	27	32	29.5	55	420	6091
TM011MOU06B	13/16	9/16	22	17	28	37	420	6091
TM011MOU10B	13/16	7/8	22	27	30	50	420	6091
TM011MOU12B	13/16	1.1/16	27	32	31.5	55	420	6091

RUN TEE MALE ORFS - MALE UNF WITH O-RING (2)

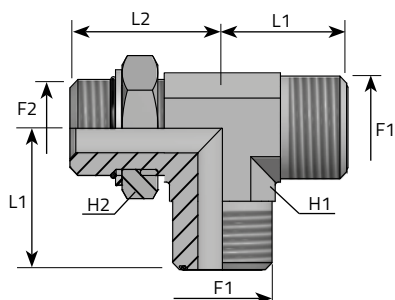


RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL BRACCIO
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS - MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM013MOU08B	1	3/4	27	22	33.5	46	420	6091
TM013MOU12B	1	1.1/16	27	32	33.5	55	420	6091
TM014MOU08B	1.3/16	3/4	30	22	37.5	47	420	6091
TM014MOU10B	1.3/16	7/8	30	27	37.5	51	420	6091
TM014MOU16B	1.3/16	1.5/16	33	41	38	59.5	380	5511
TM015MOU12B	1.7/16	1.1/16	36	32	41.5	59	420	6091
TM015MOU20B	1.7/16	1.5/8	41	50	44.5	62	280	4060
TM021MOU16B	1.11/16	1.5/16	41	41	44.5	62	280	4060
TM021MOU24B	1.11/16	1.7/8	48	55	48.5	66	280	4060
TM032MOU20B	2	1.5/8	48	50	49	66	280	4060

BRANCH TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH O-RING (1)

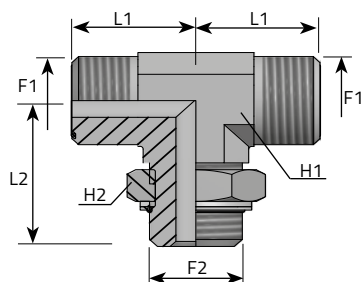


RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTOR TÊ MÂLE ORFS - MÂLE ORIENTABLE
ADAPTER T-STÜCK 2XAG-ORFS / 1 X AGR- F MIT O.R. UND HALTER
ADAPTADOR TE MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM006MOG02P	9/16	1/8	14	14	21.5	30	350	5076
TM009MOG04P	11/16	1/4	19	19	25	37	315	4568
TM011MOG06P	13/16	3/8	22	22	28	38	250	3625
TM013MOG08P	1	1/2	27	27	33.5	48	250	3625
TM014MOG12P	1.3/16	3/4	30	36	37.5	51.5	250	3625
TM015MOG16P	1.7/16	1	36	41	41.5	58.5	200	2900
TM021MOG20P	1.11/16	1.1/4	41	50	44.5	60.5	200	2900
TM032MOG24P	2	1.1/2	48	55	49	64	160	2320
TM006MOG04P	9/16	1/4	14	19	21.5	35	315	4568
TM006MOG06P	9/16	3/8	19	22	23.5	38	250	3625
TM009MOG06P	11/16	3/8	19	22	25	38	250	3625
TM009MOG08P	11/16	1/2	22	27	28	48	250	3625
TM011MOG04P	13/16	1/4	22	19	28	37	315	4568
TM011MOG08P	13/16	1/2	22	27	30	48	250	3625
TM011MOG12P	13/16	3/4	27	36	31.5	51.5	250	3625
TM013MOG04P	1	1/4	27	19	33.5	42.5	315	4568
TM013MOG06P	1	3/8	27	22	33.5	42.5	250	3625
TM013MOG12P	1	3/4	27	36	33.5	51.5	250	3625

BRANCH TEE MALE ORFS - ADJUSTABLE MALE BSPP WITH O-RING (2)

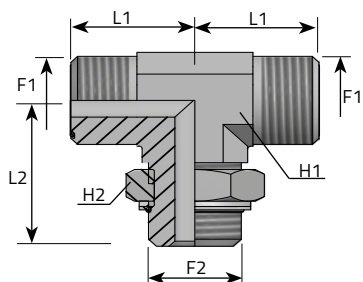


RACCORDO A "T" MASCHIO ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTOR TÊ MÂLE ORFS - MÂLE ORIENTABLE
ADAPTER T-STÜCK 2XAG-ORFS / 1 X AGR- F MIT O.R. UND HALTER
ADAPTADOR TE MACHO ORFS - MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilíndrica

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM013MOG16P	1	1	33	41	37	58.5	200	2900
TM014MOG04P	1.3/16	1/4	30	19	37.5	43.5	315	4568
TM014MOG08P	1.3/16	1/2	30	27	37.5	49	250	3625
TM014MOG16P	1.3/16	1	33	41	42	54	200	2900
TM015MOG04P	1.7/16	1/4	36	19	41.5	52	315	4568
TM015MOG12P	1.7/16	3/4	36	36	41.5	57.5	250	3625
TM015MOG20P	1.7/16	1.1/4	41	50	44.5	60.5	200	2900
TM021MOG16P	1.11/16	1	41	41	44.5	60.5	200	2900
TM021MOG24P	1.11/16	1.1/2	48	55	48.5	64	160	2320

BRANCH TEE MALE ORFS - ADJUSTABLE METRIC MALE WITH O-RING

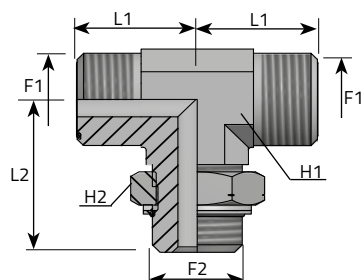


"T" MASCHIO ORFS MASCHIO METRICO ORIENTABILE AL PIEDE
ADAPTATEUR TÉ RENVERSÉ MÂLE ORFS - MÂLE MÉTRIQUE
ADAPTER T-STUCK 2XAG-ORFS / 1 XAG-METRISCH MIT O.R. UND HALTER
ADAPTADOR MACHO ORFS - MACHO MÉTRICO ORIENTABLE

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TMO06MOM12RP	9/16	12X1.5	14	17	21.5	33	315	4568
TMO09MOM14RP	11/16	14X1.5	19	19	25	35.5	315	4568
TMO11MOM18RP	13/16	18X1.5	22	24	28	41	315	4568
TMO13MOM22RP	1	22X1.5	27	27	33.5	49	250	3625
TMO14MOM27RP	1.3/16	27X2	30	32	37.5	55.5	250	3625
TMO15MOM33RP	1.7/16	33X2	36	41	41.5	59.5	160	2320
TMO21MOM42RP	1.11/16	42X2	41	50	44.5	63	160	2320
TMO32MOM48RP	2	48X2	48	55	49	68.5	160	2320
TMO06MOM10RP	9/16	10X1	14	14	21.5	30	315	4568
TMO09MOM16RP	11/16	16X1.5	19	22	25	37.5	315	4568
TMO11MOM16RP	13/16	16X1.5	22	22	28	37.5	315	4568
TMO11MOM22RP	13/16	22X1.5	27	27	31.5	49	250	3625
TMO13MOM18RP	1	18X1.5	27	24	33.5	47.5	315	4568
TMO13MOM27RP	1	27X2	27	32	33.5	55.5	250	3625
TMO14MOM22RP	1.3/16	22X1.5	30	27	37.5	49.5	250	3625
TMO14MOM33RP	1.3/16	33X2	33	41	38	59.5	160	2320
TMO15MOM27RP	1.7/16	27X2	36	32	41.5	59.5	250	3625
TMO15MOM42RP	1.7/16	42X2	41	50	44.5	63	160	2320
TMO21MOM48RP	1.11/16	48X2	48	55	48.5	68.5	160	2320

ADJUSTABLE BRANCH TEE MALE ORFS - MALE UNF WITH O-RING (1)

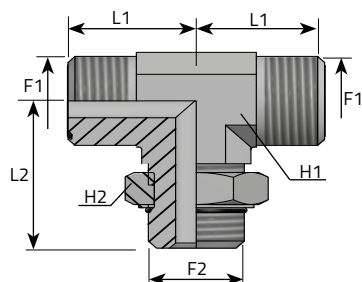


RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL PIEDE
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS - MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L2	Bar	Psi
			mm	mm	mm	mm		
TM006MOU04P	9/16	7/16	14	14	21.5	32.5	420	6091
TM009MOU06P	11/16	9/16	19	17	25	37	420	6091
TM011MOU08P	13/16	3/4	22	22	28	40.5	420	6091
TM013MOU10P	1	7/8	27	27	33.5	50	420	6091
TM014MOU12P	1.3/16	1.1/16	30	32	37.5	55	420	6091
TM015MOU16P	1.7/16	1.5/16	36	41	41.5	59.5	380	5511
TM021MOU20P	1.11/16	1.5/8	41	50	44.5	62	280	4060
TM032MOU24P	2	1.7/8	48	55	49	66	280	4060
TM006MOU06P	9/16	9/16	14	17	21.5	34.5	420	6091
TM006MOU08P	9/16	3/4	19	22	23.5	40.5	420	6091
TM009MOU04P	11/16	7/16	19	14	25	35	420	6091
TM009MOU08P	11/16	3/4	19	22	25	40.5	420	6091
TM009MOU10P	11/16	7/8	22	27	28	50	420	6091
TM009MOU12P	11/16	1.1/16	27	32	29.5	55	420	6091
TM011MOU06P	13/16	9/16	22	17	28	37	420	6091
TM011MOU10P	13/16	7/8	22	27	30	50	420	6091
TM011MOU12P	13/16	1.1/16	27	32	31.5	55	420	6091

ADJUSTABLE BRANCH TEE MALE ORFS - MALE UNF WITH O-RING (2)

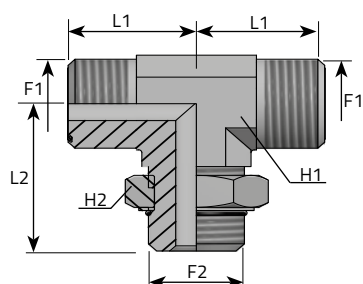


RACCORDO A "T" MASCHIO ORFS MASCHIO UNF CON O-RING AL PIEDE
 RENVERSÉ MÂLE ORFS - MÂLE UNF AVEC O-RING
 ADAPTER T-STÜCK 2 X AG-ORFS / 1 X AG- UNF MIT O.R.
 ADAPTADOR EN L MACHO ORFS - MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions				Pressure	
	F1	F2	H1	H2	L1	L1	Bar	Psi
			mm	mm	mm	mm		
TM013MOU08P	1	3/4	27	22	33.5	46	420	6091
TM013MOU12P	1	1.1/16	27	32	33.5	55	420	6091
TM014MOU08P	1.3/16	3/4	30	22	37.5	47	420	6091
TM014MOU10P	1.3/16	7/8	30	27	37.5	51	420	6091
TM014MOU16P	1.3/16	1.5/16	33	41	38	59.5	380	5511
TM015MOU12P	1.7/16	1.1/16	36	32	41.5	59	420	6091
TM015MOU20P	1.7/16	1.5/8	41	50	44.5	62	280	4060
TM021MOU16P	1.11/16	1.5/16	41	41	44.5	62	280	4060
TM021MOU24P	1.11/16	1.7/8	48	55	48.5	66	280	4060
TM032MOU20P	2	1.5/8	48	50	49	66	280	4060

90° ADAPTOR FEMALE ORFS – ADJUSTABLE MALE BSPP WITH O-RING




GOMITO A 90° FEMMINA ORFS MASCHIO GAS CILINDRICO ORIENTABILE
ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORIENTABLE BSPP
ADAPTER 90° IG-ORFS / AG-BSPP MIT O.R UND HALTER
CODO 90° HEMBRA ORFS – MACHO ORIENTABLE BSPP

F1 ORFS

F2 Zylinder-Gasgewinde, Gas cilindrico, BSPP, Gaz cylindrique,
Gas cilindrica

Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	H3	L1	L2		Bar	Psi
			mm	mm	mm	mm	mm			
LFG006MOG02	9/16	1/8	14	17	14	26.5	30		350	5076
LFG009MOG04	11/16	1/4	19	22	19	29	37		315	4568
LFG011MOG06	13/16	3/8	22	24	22	38	38		250	3625
LFG013MOG08	1	1/2	27	30	27	41	48		250	3625
LFG014MOG12	1.3/16	3/4	30	36	36	46.5	51.5		250	3625
LFG015MOG16	1.7/16	1	36	41	41	53.5	58.5		200	2900
LFG021MOG20	1.11/16	1.1/4	41	50	50	58	60.5		200	2900
LFG032MOG24	2	1.1/2	48	60	55	61	64		160	2320

90° ADAPTOR FEMALE ORFS – ADJUSTABLE METRIC MALE WITH O-RING

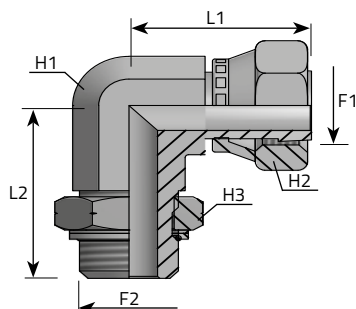


GOMITO A 90° FEMMINA ORFS MASCHIO METRICO ORIENTABILE
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE ORIENTABLE MÉTRIQUE
 ADAPTER 90° IG-ORFS / AG-METRISH MIT O.R UND HALTER
 CODO 90° HEMBRA ORFS – MACHO ORIENTABLE MÉTRICO

F1 ORFS

F2 Metrisch, Metrico, Metric, Métrique, Métrico

Code	Thread		Dimensions					Pressure	
	F1	F2	H1	H2	H3	L1	L2	Bar	Psi
			mm	mm	mm	mm	mm		
LFG006MOM12R	9/16	12X1.5	14	17	17	26.5	33	315	4568
LFG009MOM14R	11/16	14X1.5	19	22	19	29	35.5	315	4568
LFG011MOM18R	13/16	18X1.5	22	24	24	38	41	315	4568
LFG013MOM22R	1	22X1.5	27	30	27	41	49	250	3625
LFG014MOM27R	1.3/16	27X2	30	36	32	46.5	55.5	250	3625
LFG015MOM33R	1.7/16	33X2	36	41	41	53.5	59.5	160	2320
LFG021MOM42R	1.11/16	42X2	41	50	50	58	63	160	2320
LFG032MOM48R	2	48X2	48	60	55	61	68.5	160	2320

90° ADAPTOR FEMALE ORFS – MALE UNF WITH O-RING

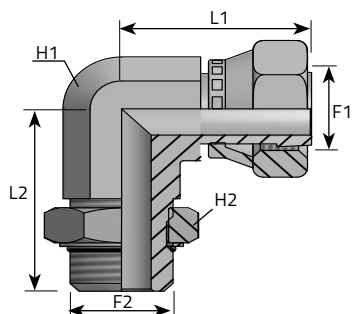


GOMITO A 90° FEMMINA ORFS MASCHIO UNF CON O-RING
 ADAPTATEUR COUDE 90° FEMELLE ORFS – MÂLE UNF AVEC O-RING
 ADAPTER 90° IG-ORFS / AG-UNF MIT O.R.
 CODO 90° HEMBRA ORFS – MACHO UNF CON O-RING

F1 ORFS

F2 UNF

Code	Thread		Dimensions						Pressure	
	F1	F2	H1	H2	H3	L1	L2		Bar	Psi
			mm	mm	mm	mm	mm			
LFG006MOU04	9/16	7/16	14	17	14	26.5	32.5		420	6091
LFG009MOU06	11/16	9/16	19	22	17	29	37		420	6091
LFG011MOU08	13/16	3/4	22	24	22	38	40.5		420	6091
LFG013MOU10	1	7/8	27	30	27	41	50		420	6091
LFG014MOU12	1.3/16	1.1/16	30	36	32	46.5	55		420	6091
LFG015MOU16	1.7/16	1.5/16	36	41	41	53.5	59.5		380	5511
LFG021MOU20	1.11/16	1.5/8	41	50	50	58	62		280	4060
LFG032MOU24	2	1.7/8	48	60	55	61	66		280	4060

MALE PLUG UNF/UN-2A




TAPPO MASCHIO FILETTO UNF/UN-2A
BOUCHON MÂLE UNF/UN-2A
VERSCHLUSSKAPPE - UNF/UN-2A
TAPÓN MACHO UNF/UN

F1 UNF

Code	Thread	Dimensions		Pressure	
		F1	L1	Bar	Psi
		mm	mm		
ATM006	9/16	17	16.5	630	9136
ATM009	11/16	19	19	630	9136
ATM011	13/16	22	22	630	9136
ATM013	1	27	26	420	6091
ATM014	1.3/16	32	27.5	420	6091
ATM015	1.7/16	41	28	420	6091
ATM021	1.11/16	46	28	280	4060
ATM032	2	55	28	280	4060

SWIVEL FEMALE PLUG UNF/UN-2B



TAPPO FEMMINA CON DADO GIREVOLE FILETTO UNF/UN-2B
BOUCHON FEMELLE TOURNANTE UNF/UN-2B
VERSCHLUSSKAPPE UNF/UN-2B
TAPÓN HEMBRA GIRATORIA UNF/UN-2B

F1 UNF

Code	Thread	Dimensions			Pressure	
		H	L1	L2	Bar	Psi
	F1	mm	mm	mm		
ATFG006	9/16	17	16.5	8.5	630	9136
ATFG009	11/16	22	18	9.5	630	9136
ATFG011	13/16	24	22	12	630	9136
ATFG013	1	30	24.5	12	420	6091
ATFG014	1.3/16	36	27	13.5	420	6091
ATFG015	1.7/16	41	28.5	15	420	6091
ATFG021	1.11/16	50	28.5	15	280	4060
ATFG032	2	60	28.5	15	280	4060

NOTES

[illegible]

[illegible]



ORFS J1453 a-2016 eu

Data reported in this catalogue are not binding.
Vitillo S.p.a. reserves the right to change specifications without notice.

I dati riportati nella seguente pubblicazione non sono vincolanti.
Vitillo S.p.a. si riserva di apportare modifiche senza preavviso.

Les données exposées dans ce catalogue ne sont pas contraignantes.
Vitillo s.p.a se réserve le droit d'apporter des modifications sans aucun préavis.

Die vorliegenden Angaben sind nicht bindend.
Vitillo S.p.a. behält sich technische Änderungen vor ohne Mitteilung.

Los datos referidos en la presente publicación son indicativos.
Vitillo S.p.a. se reserva el derecho de modificar las especificaciones sin aviso previo.